





If one of the sides of the hood module is either at the right or left extremity of the hood, you need to install the corresponding side panel to this side

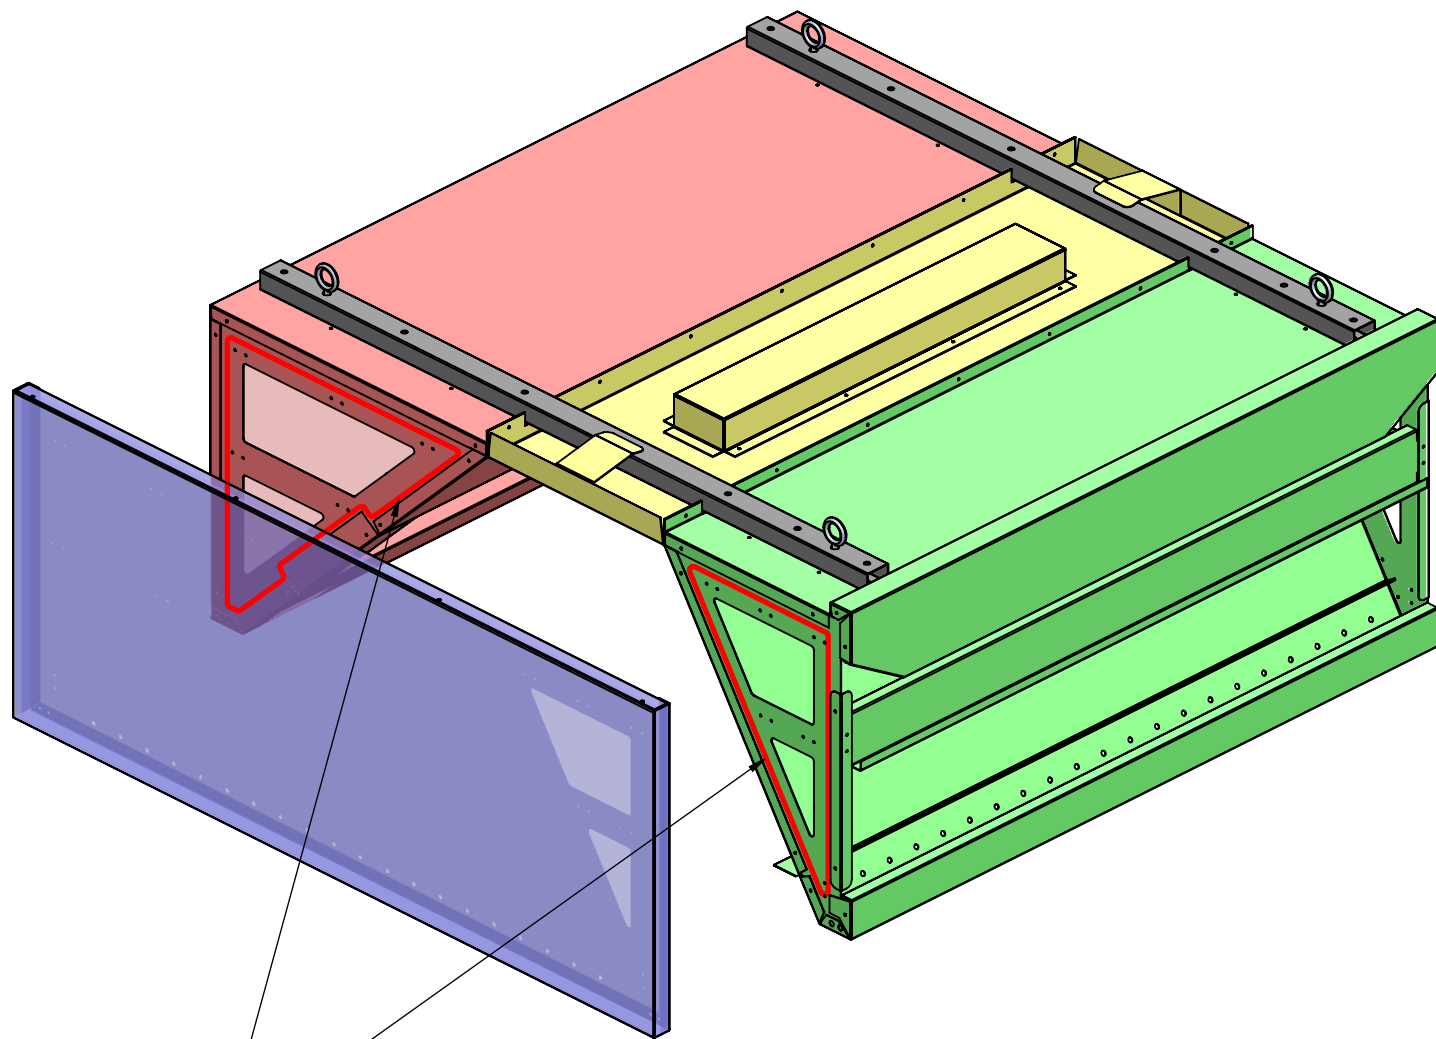


Apply silicone along these lines,  
about 25mm from the outer edge

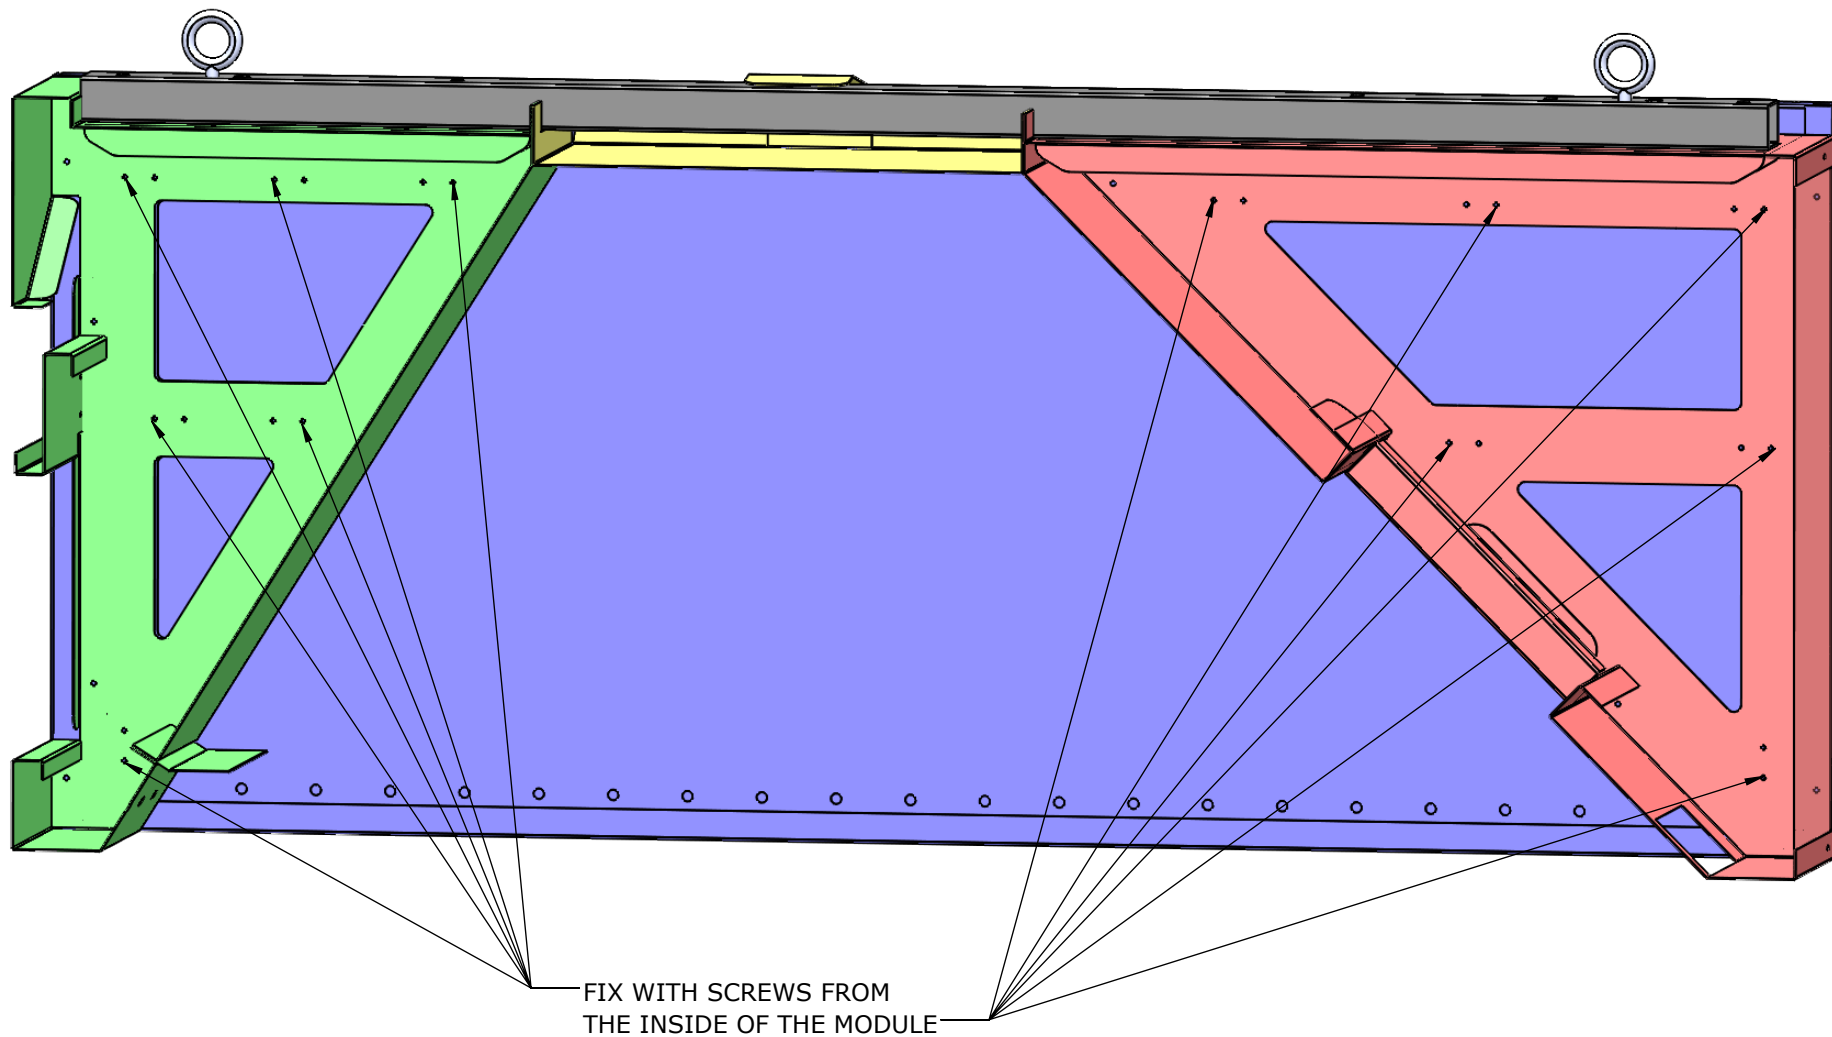


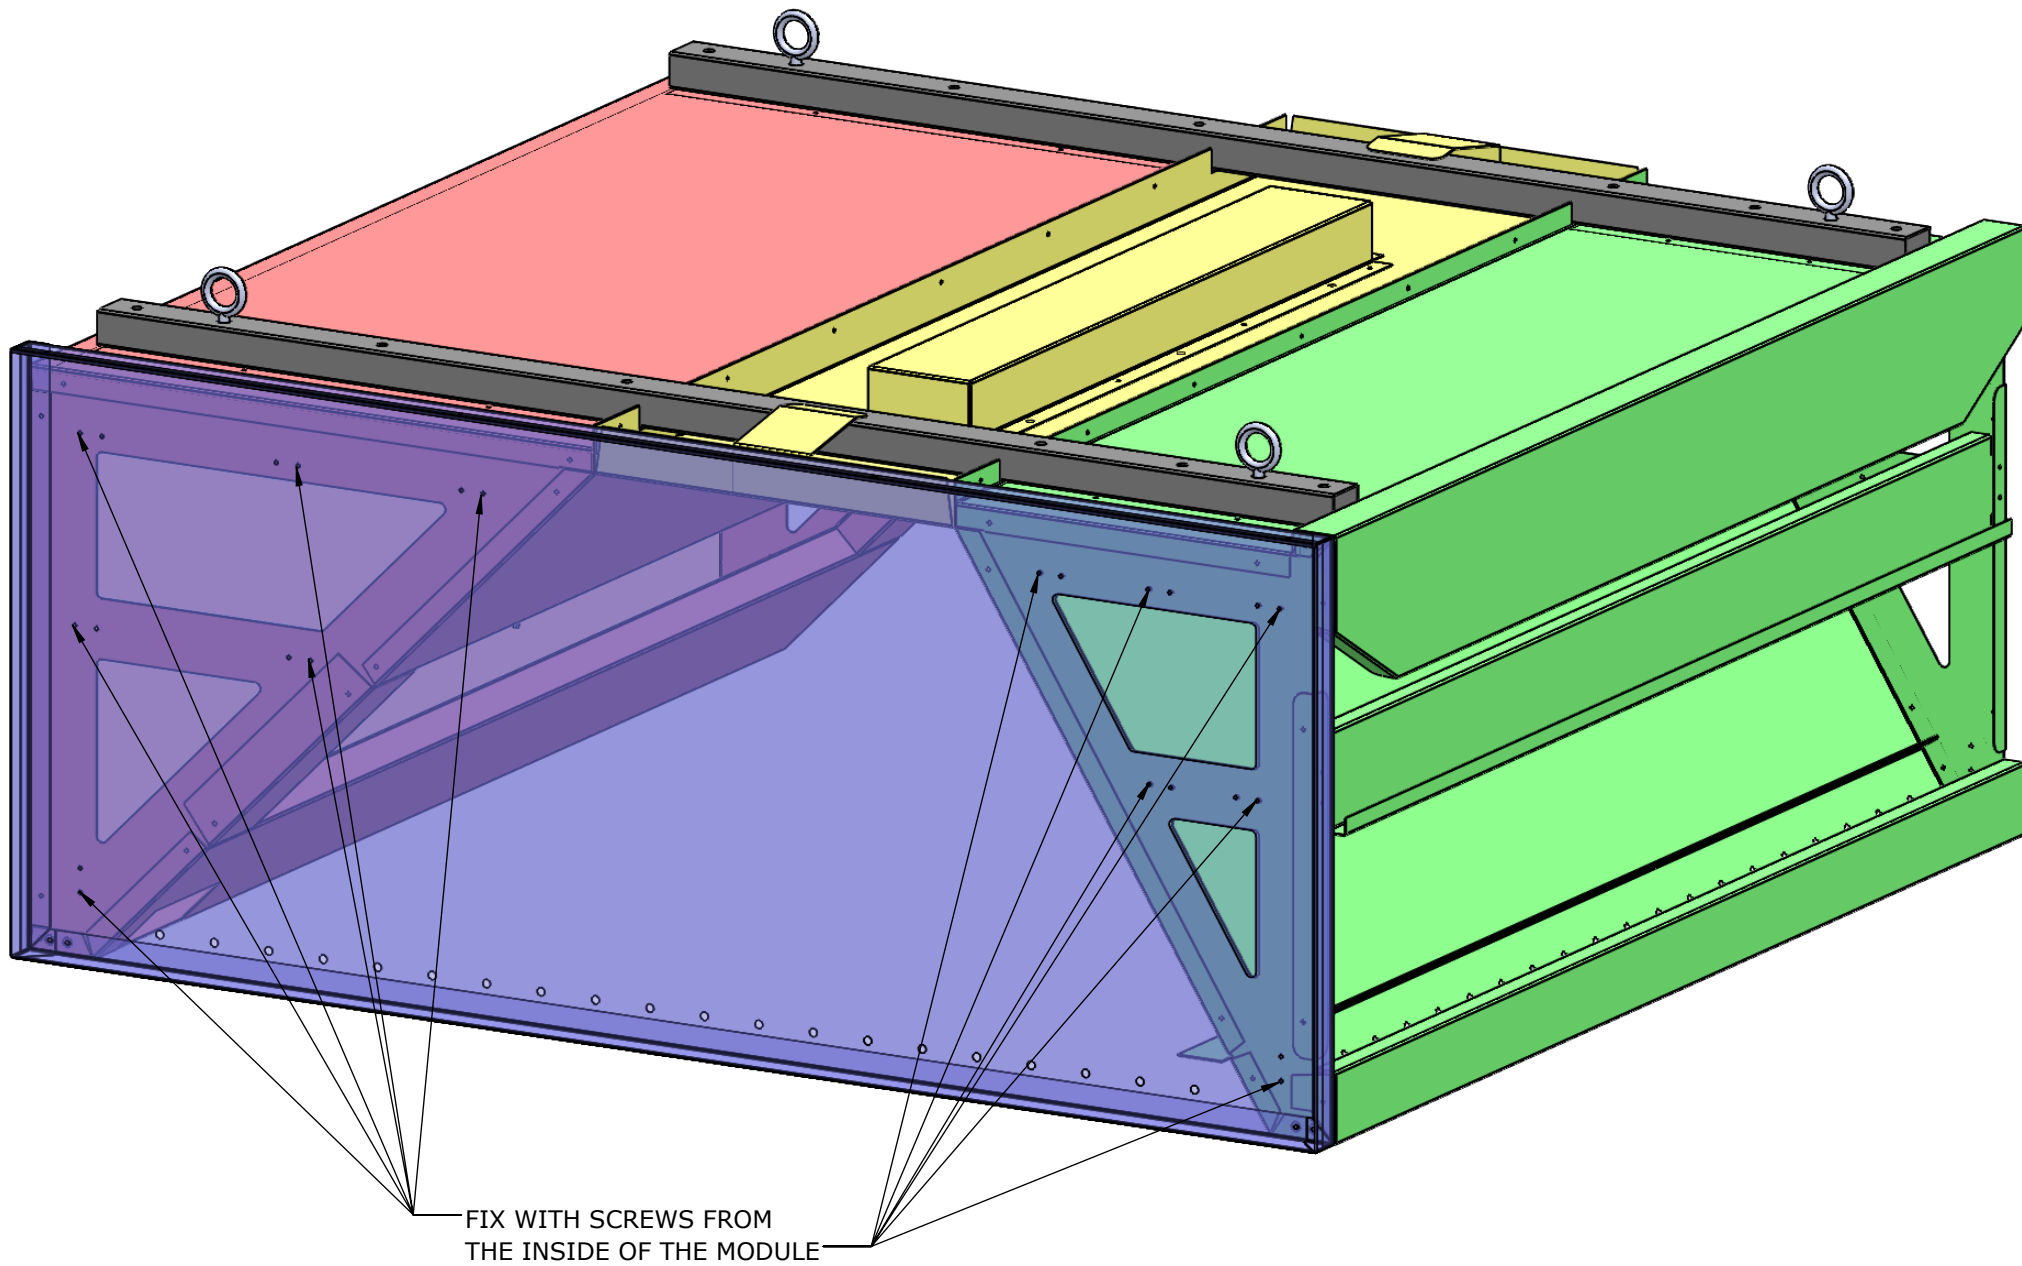


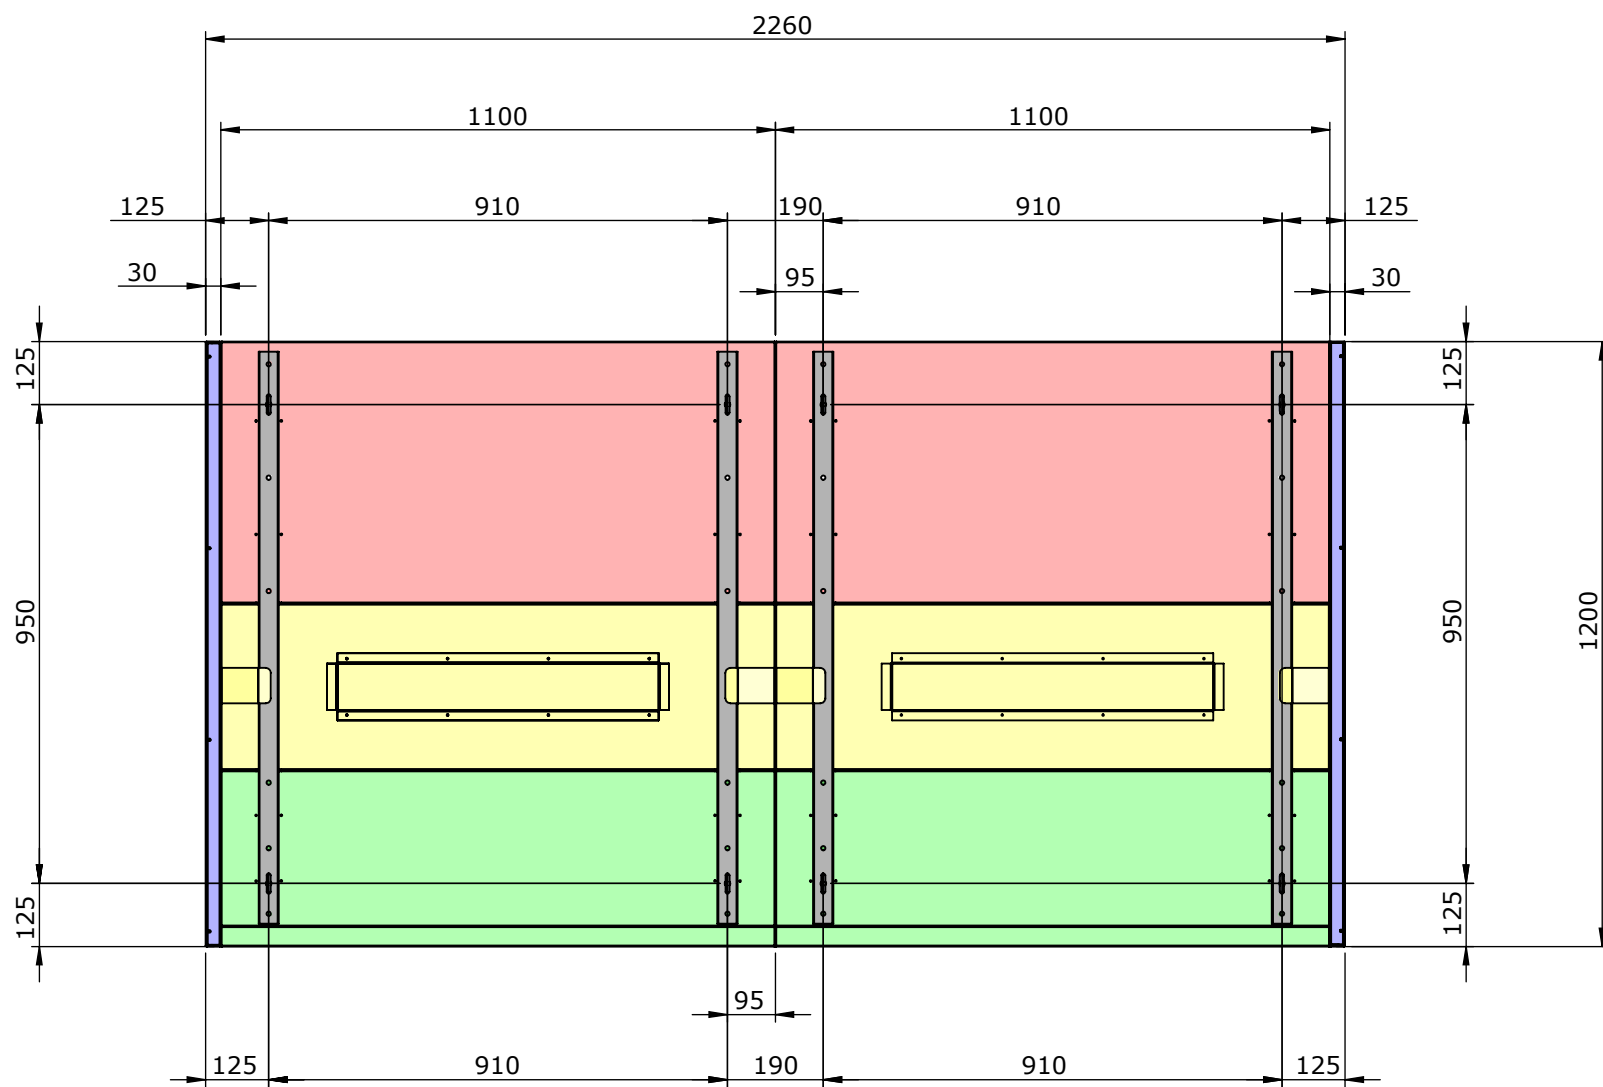





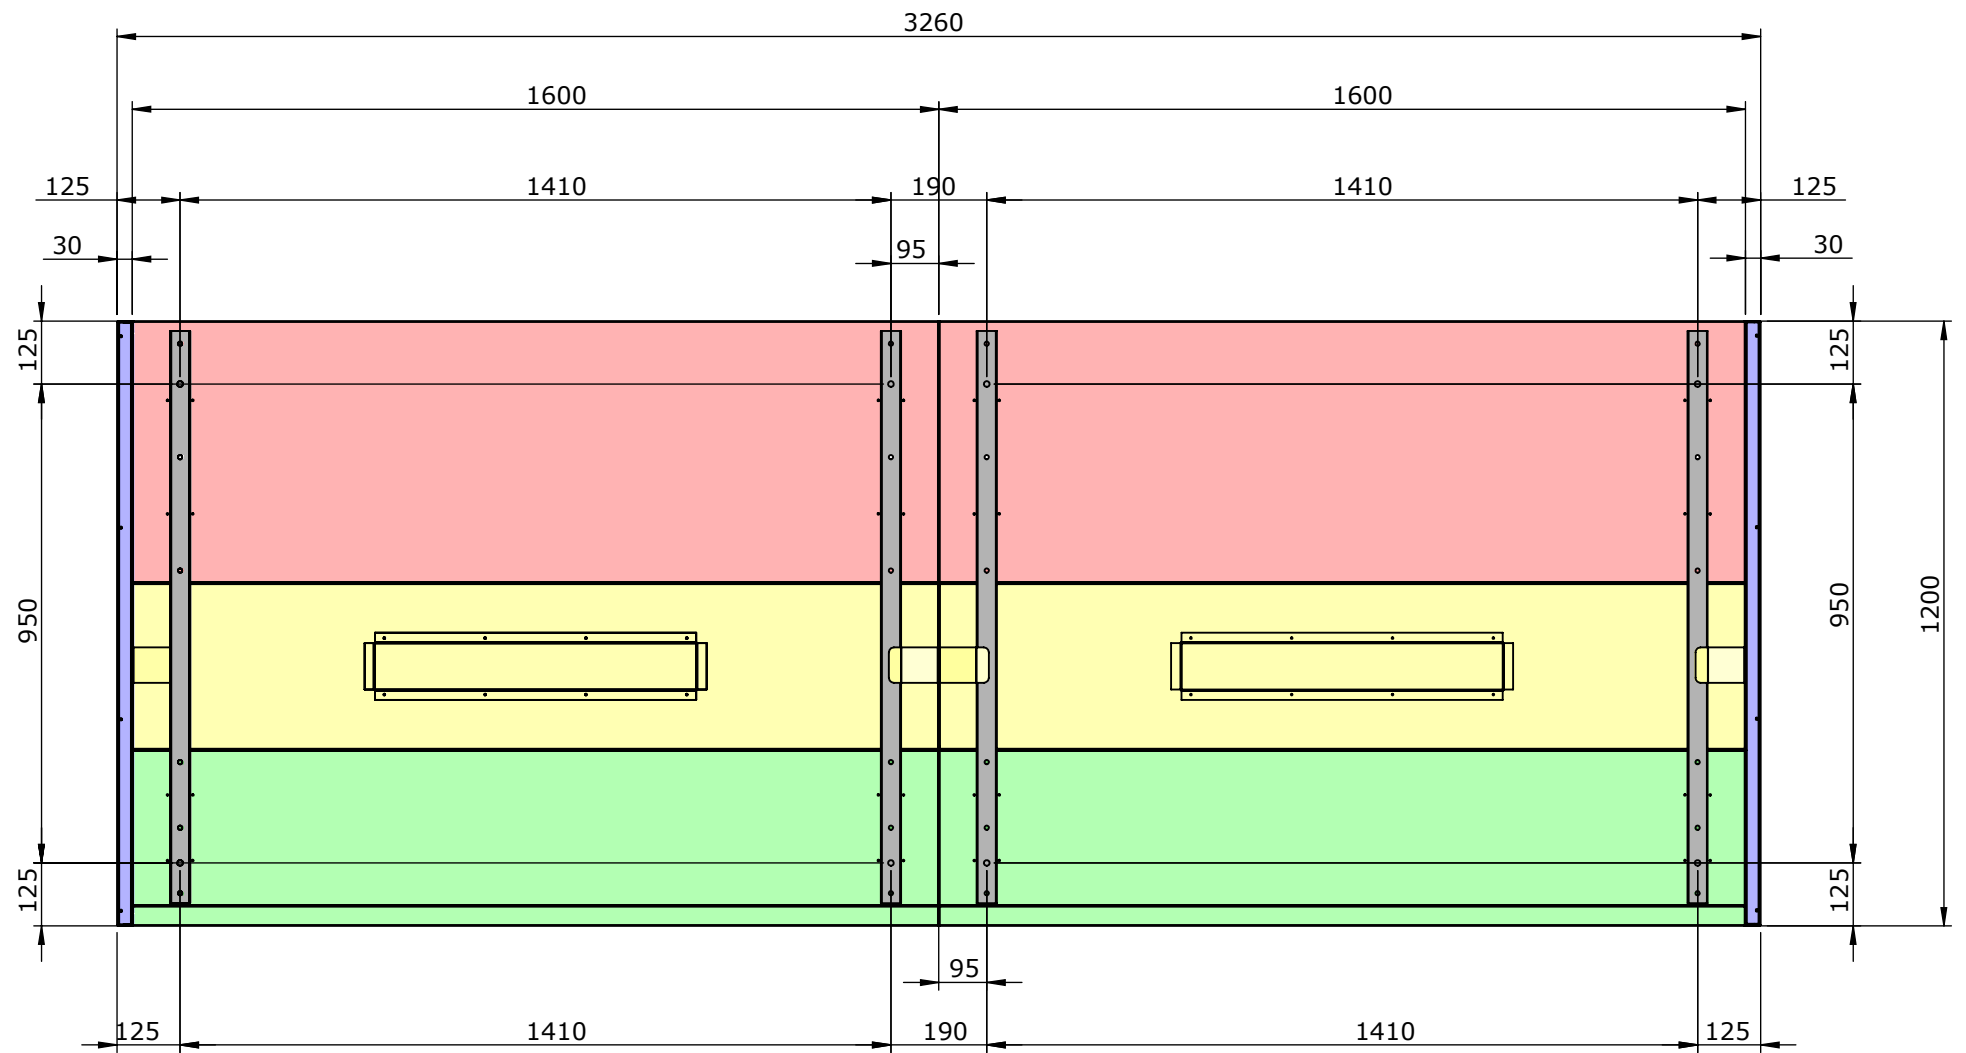

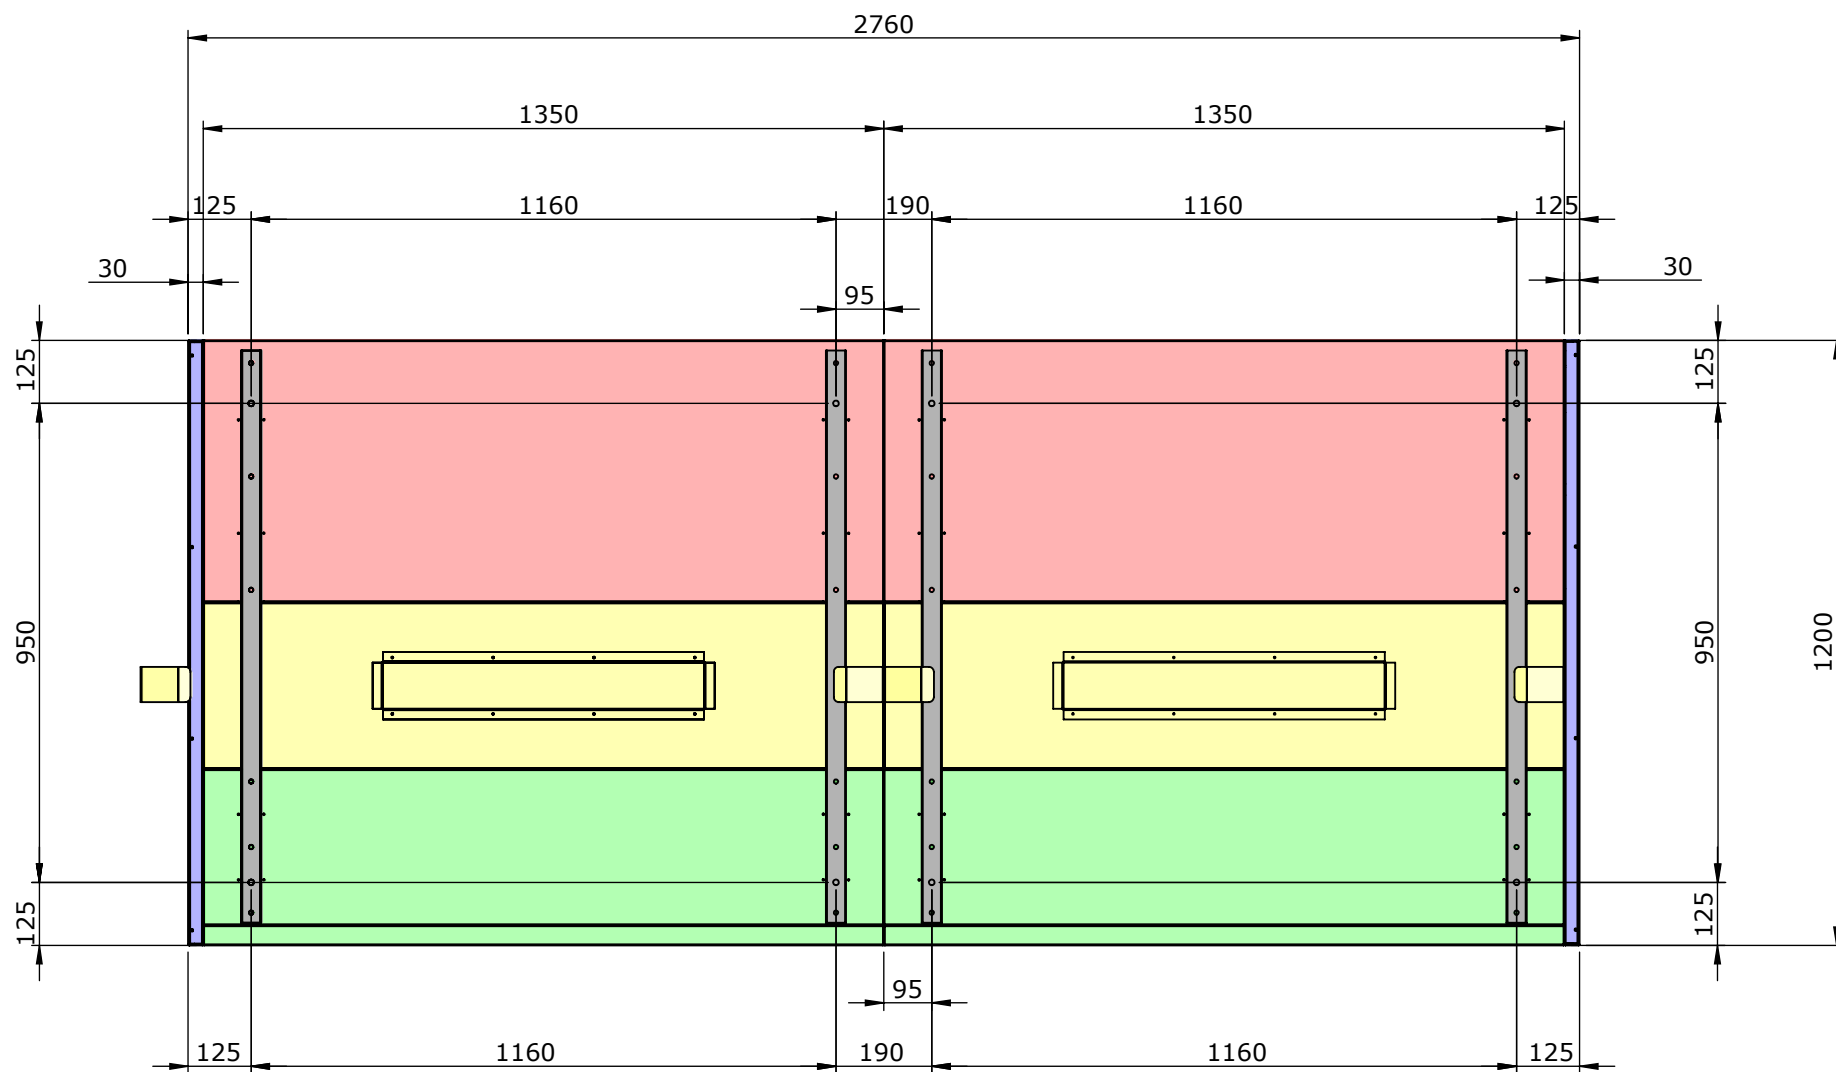


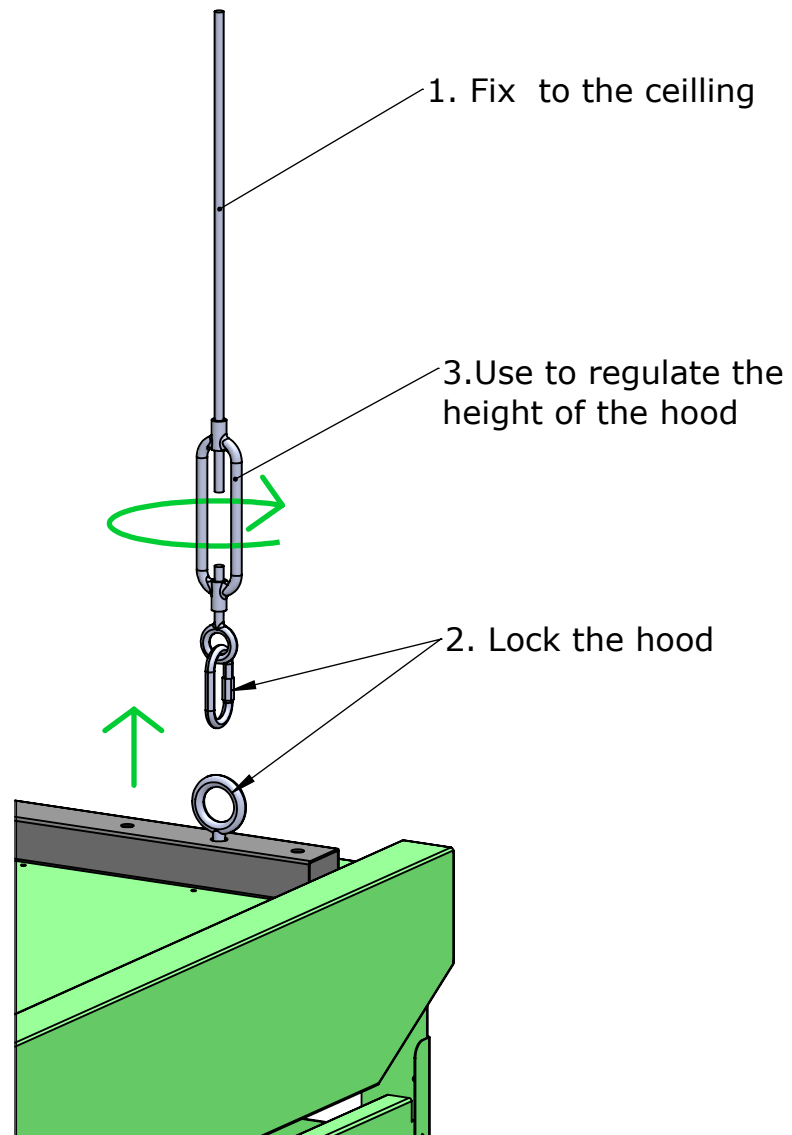

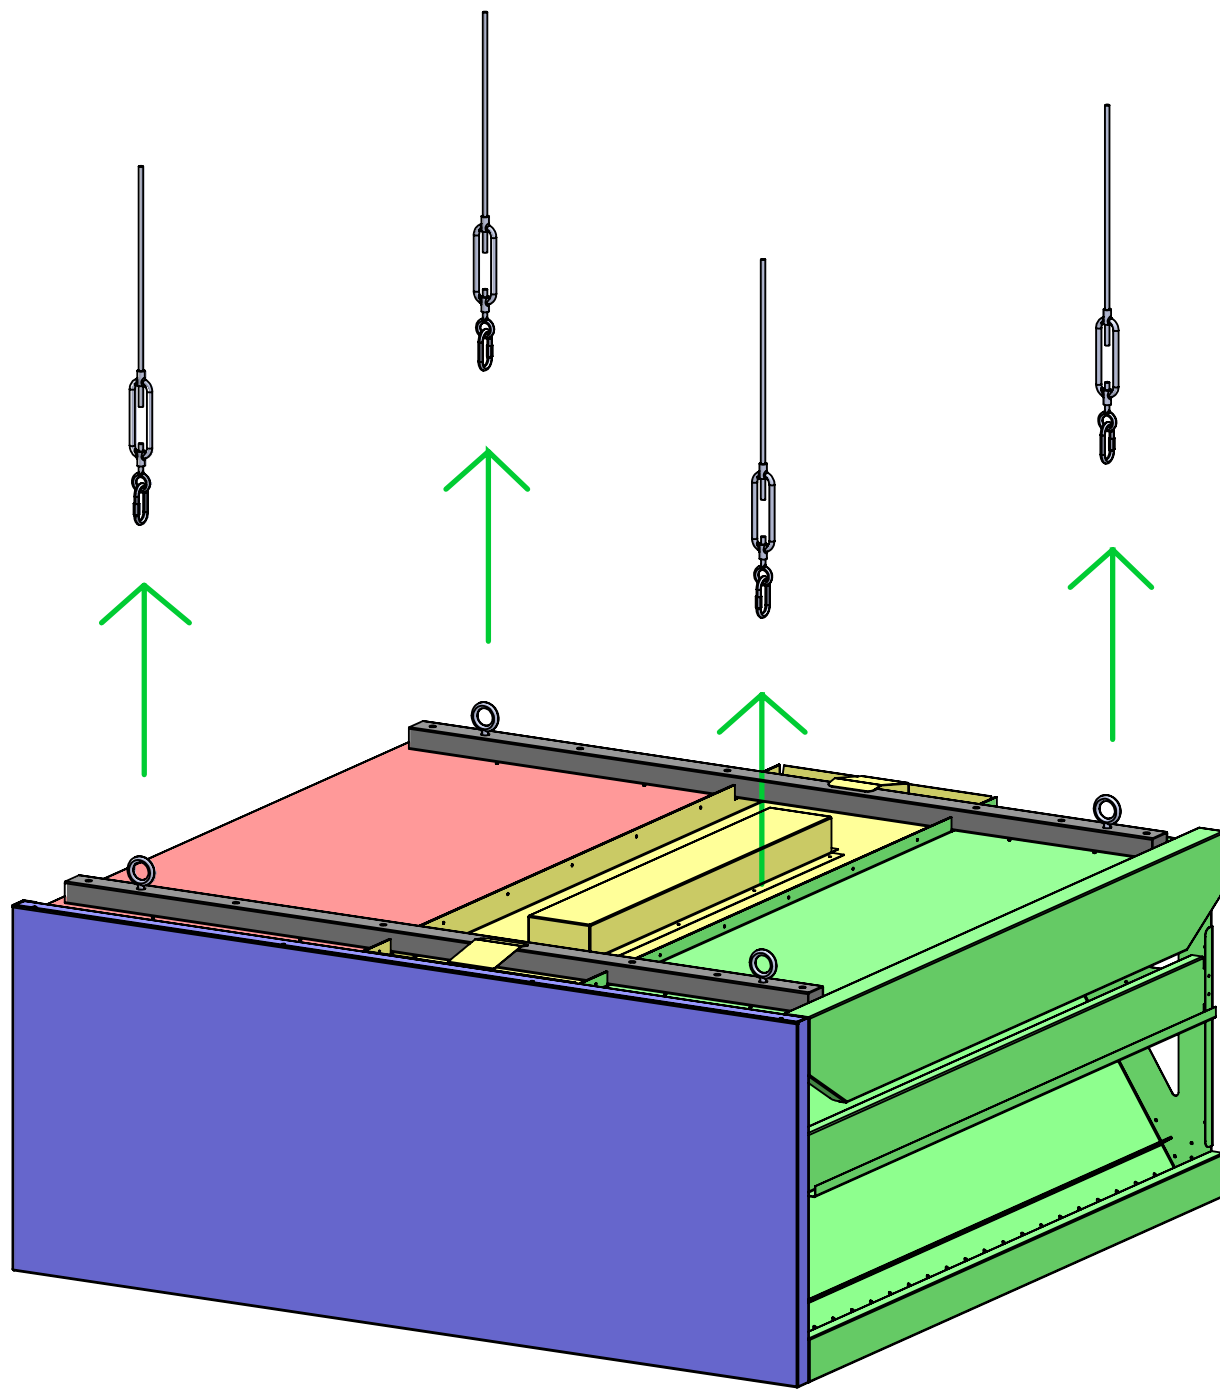

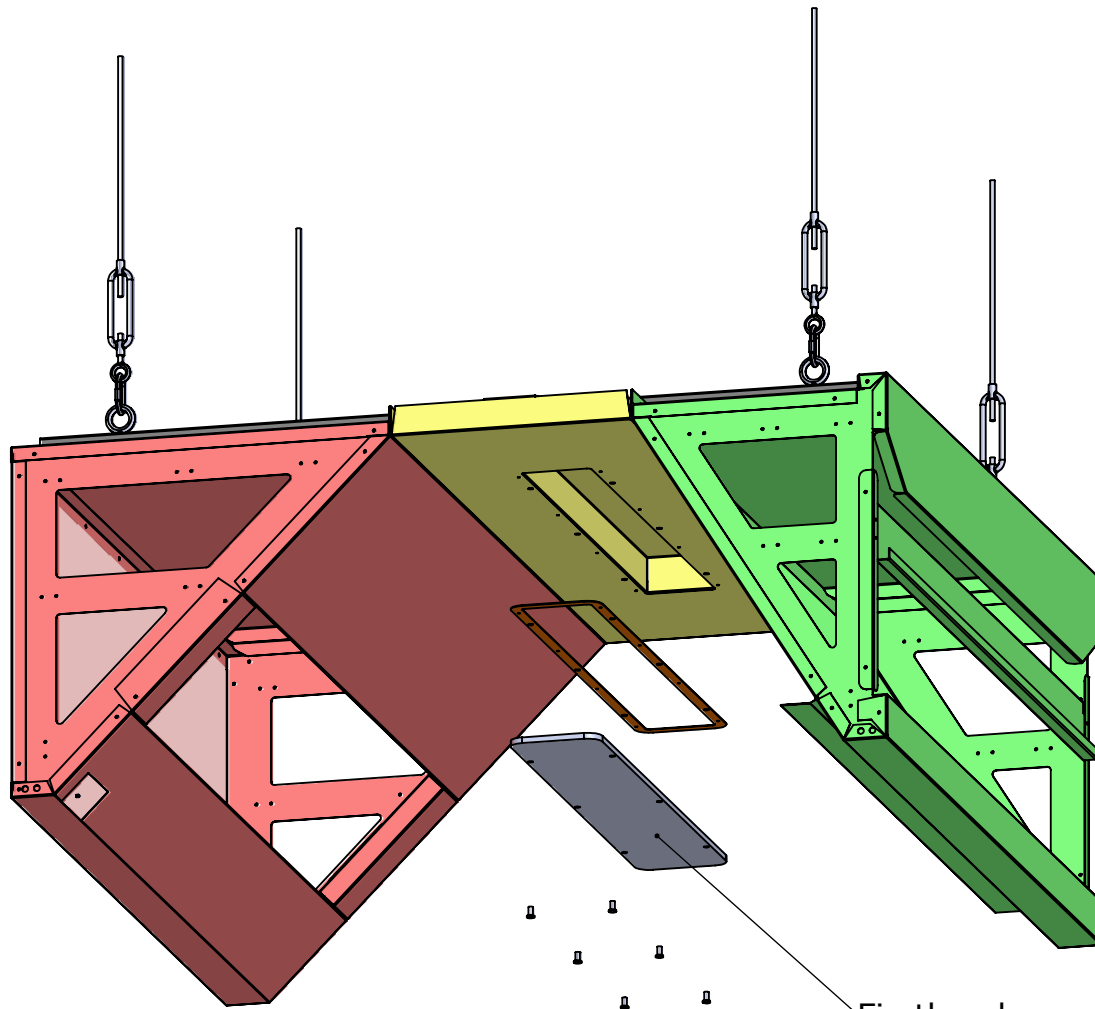



Fix the glass panel and gasket  
to the roof using the dedicated  
6 glass screws with special washers

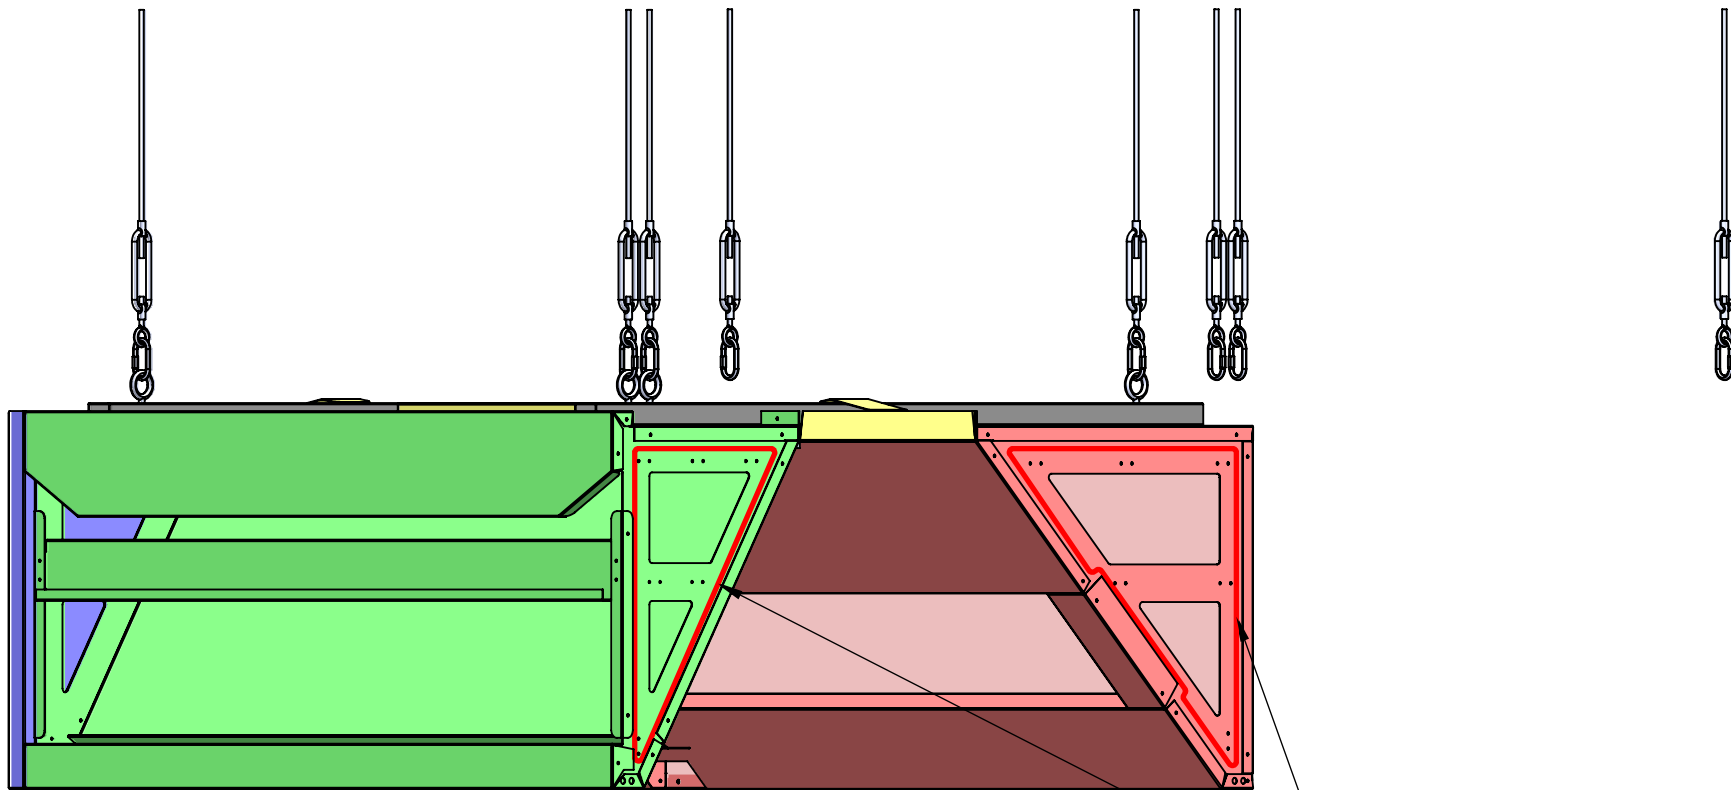


2. Apply silicone along these lines, aproximatively 25mm from the outer edge

1. Assembly the next module

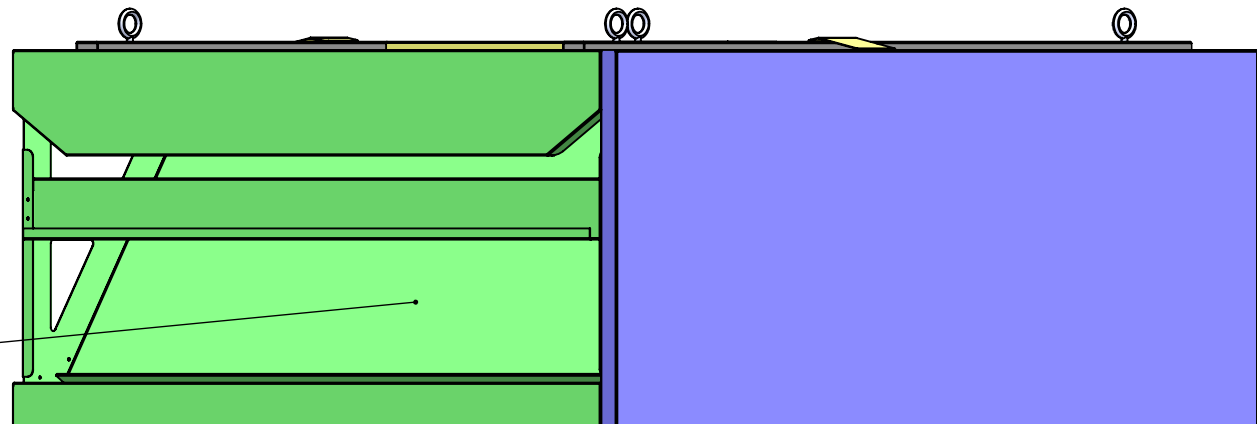

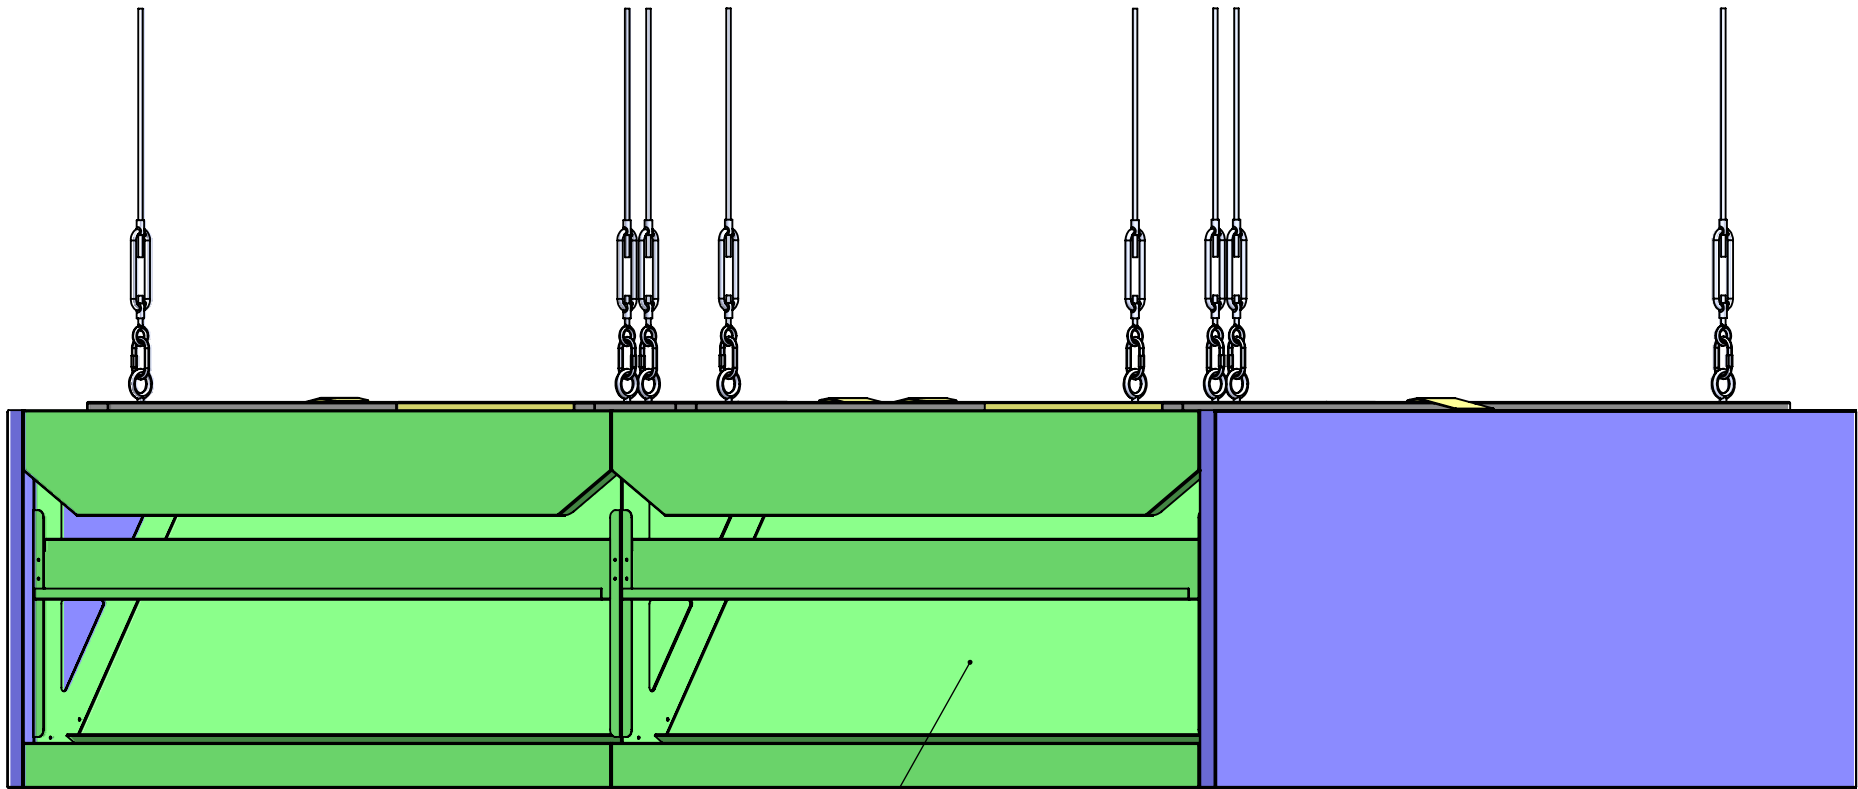



3. Mount the next module to the ceiling  
in a similar manner as the first one

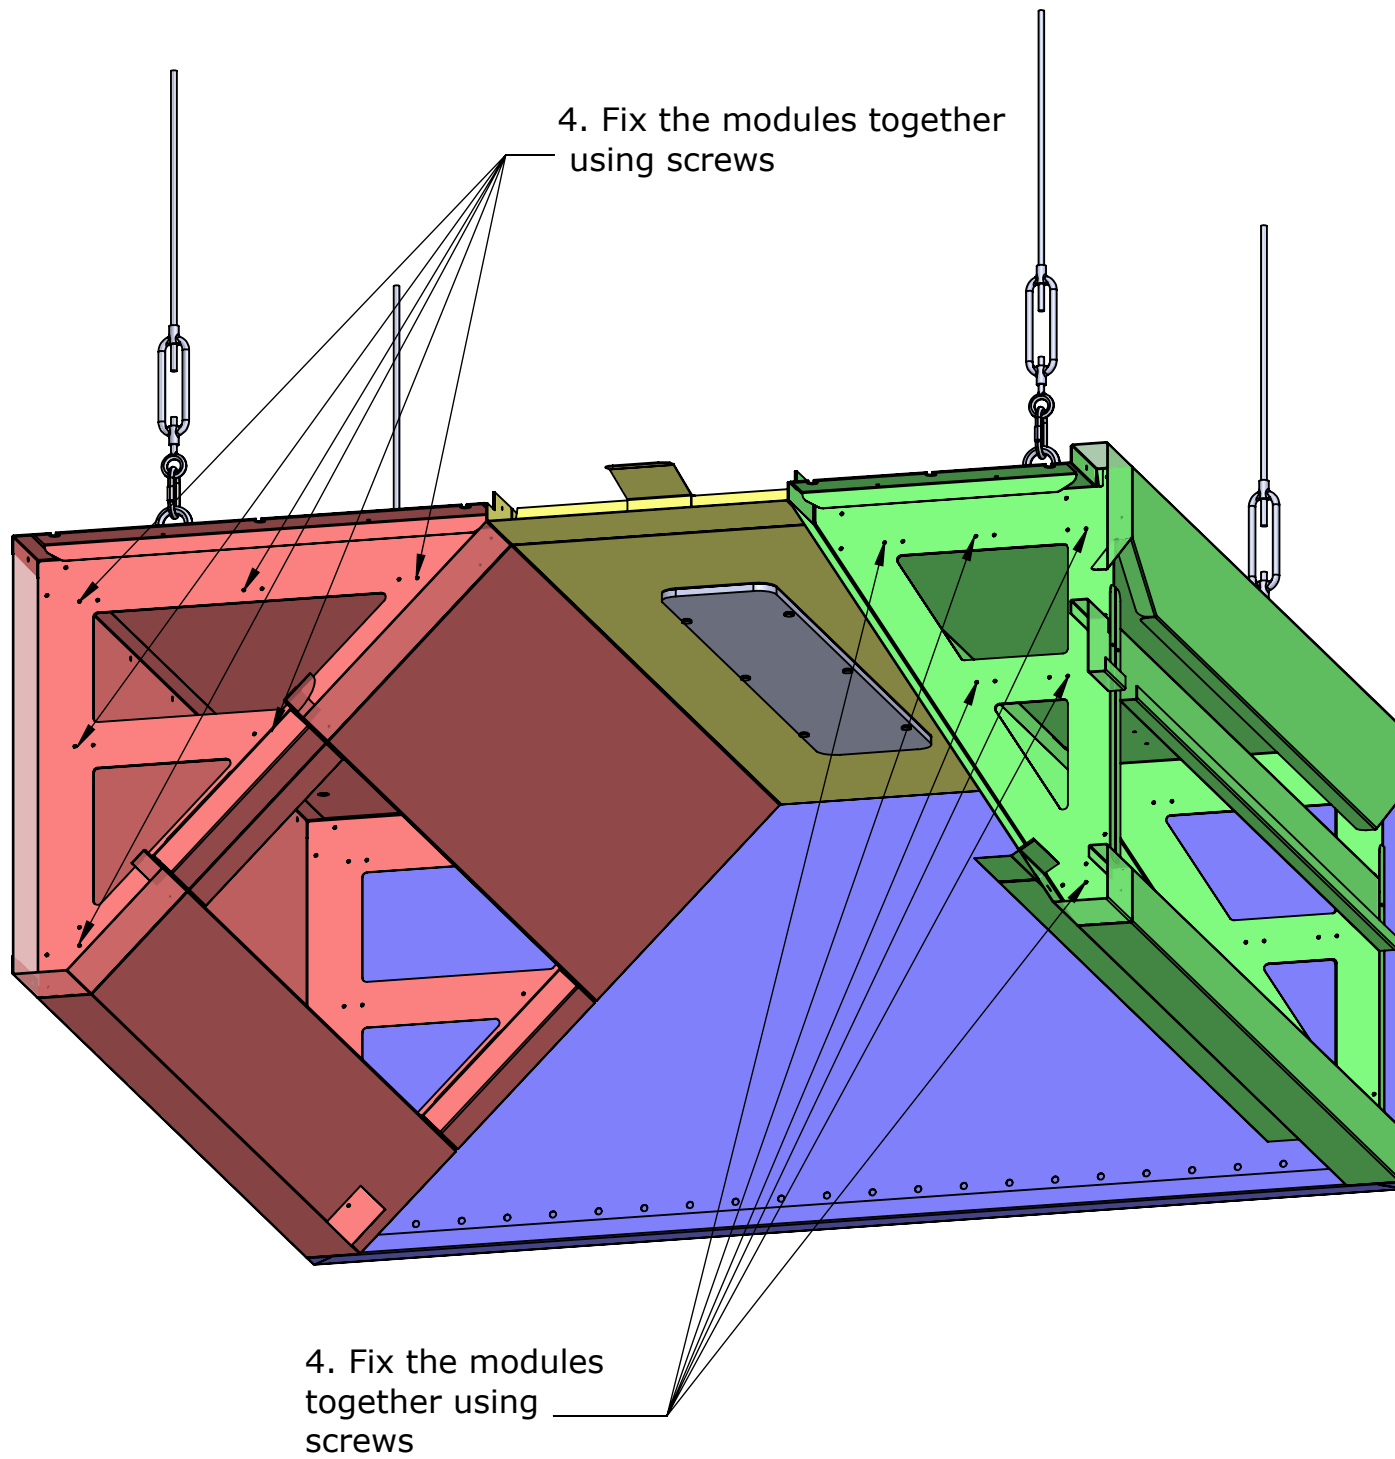





Install ventilation duct  
to the roof of each modules

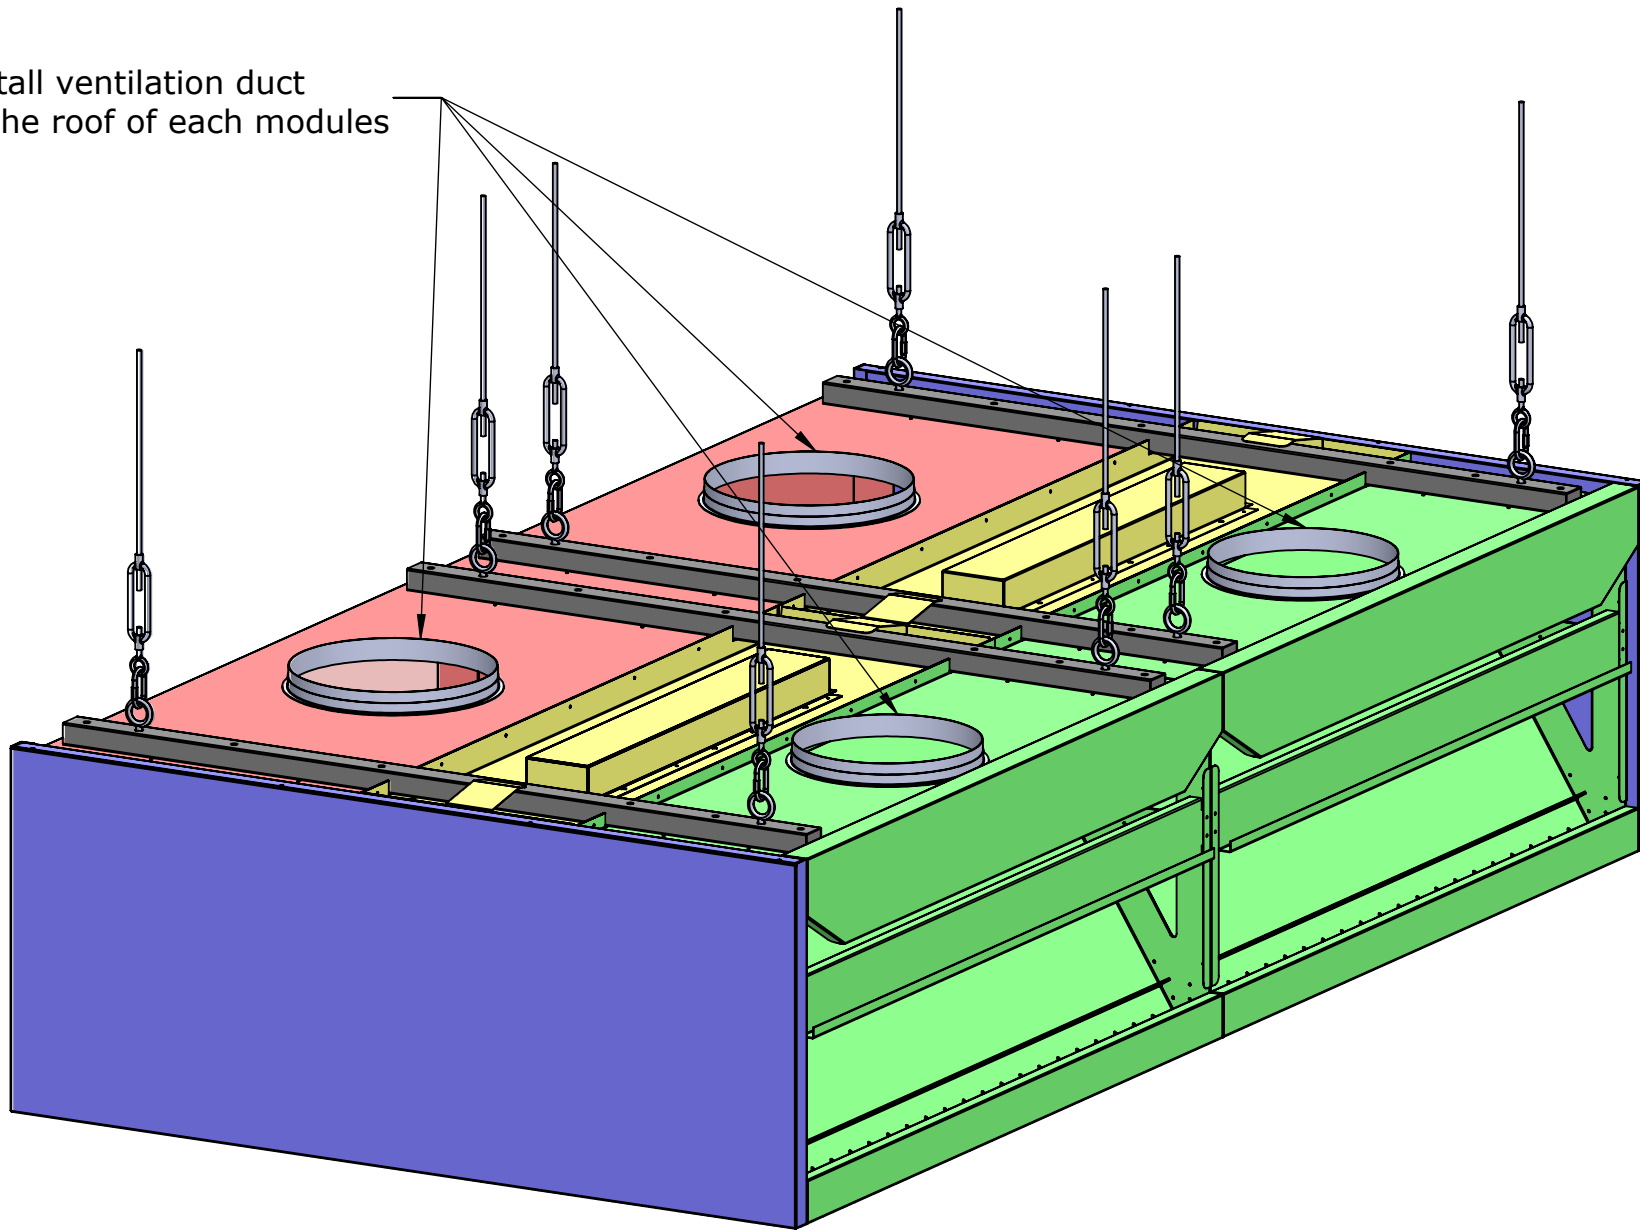


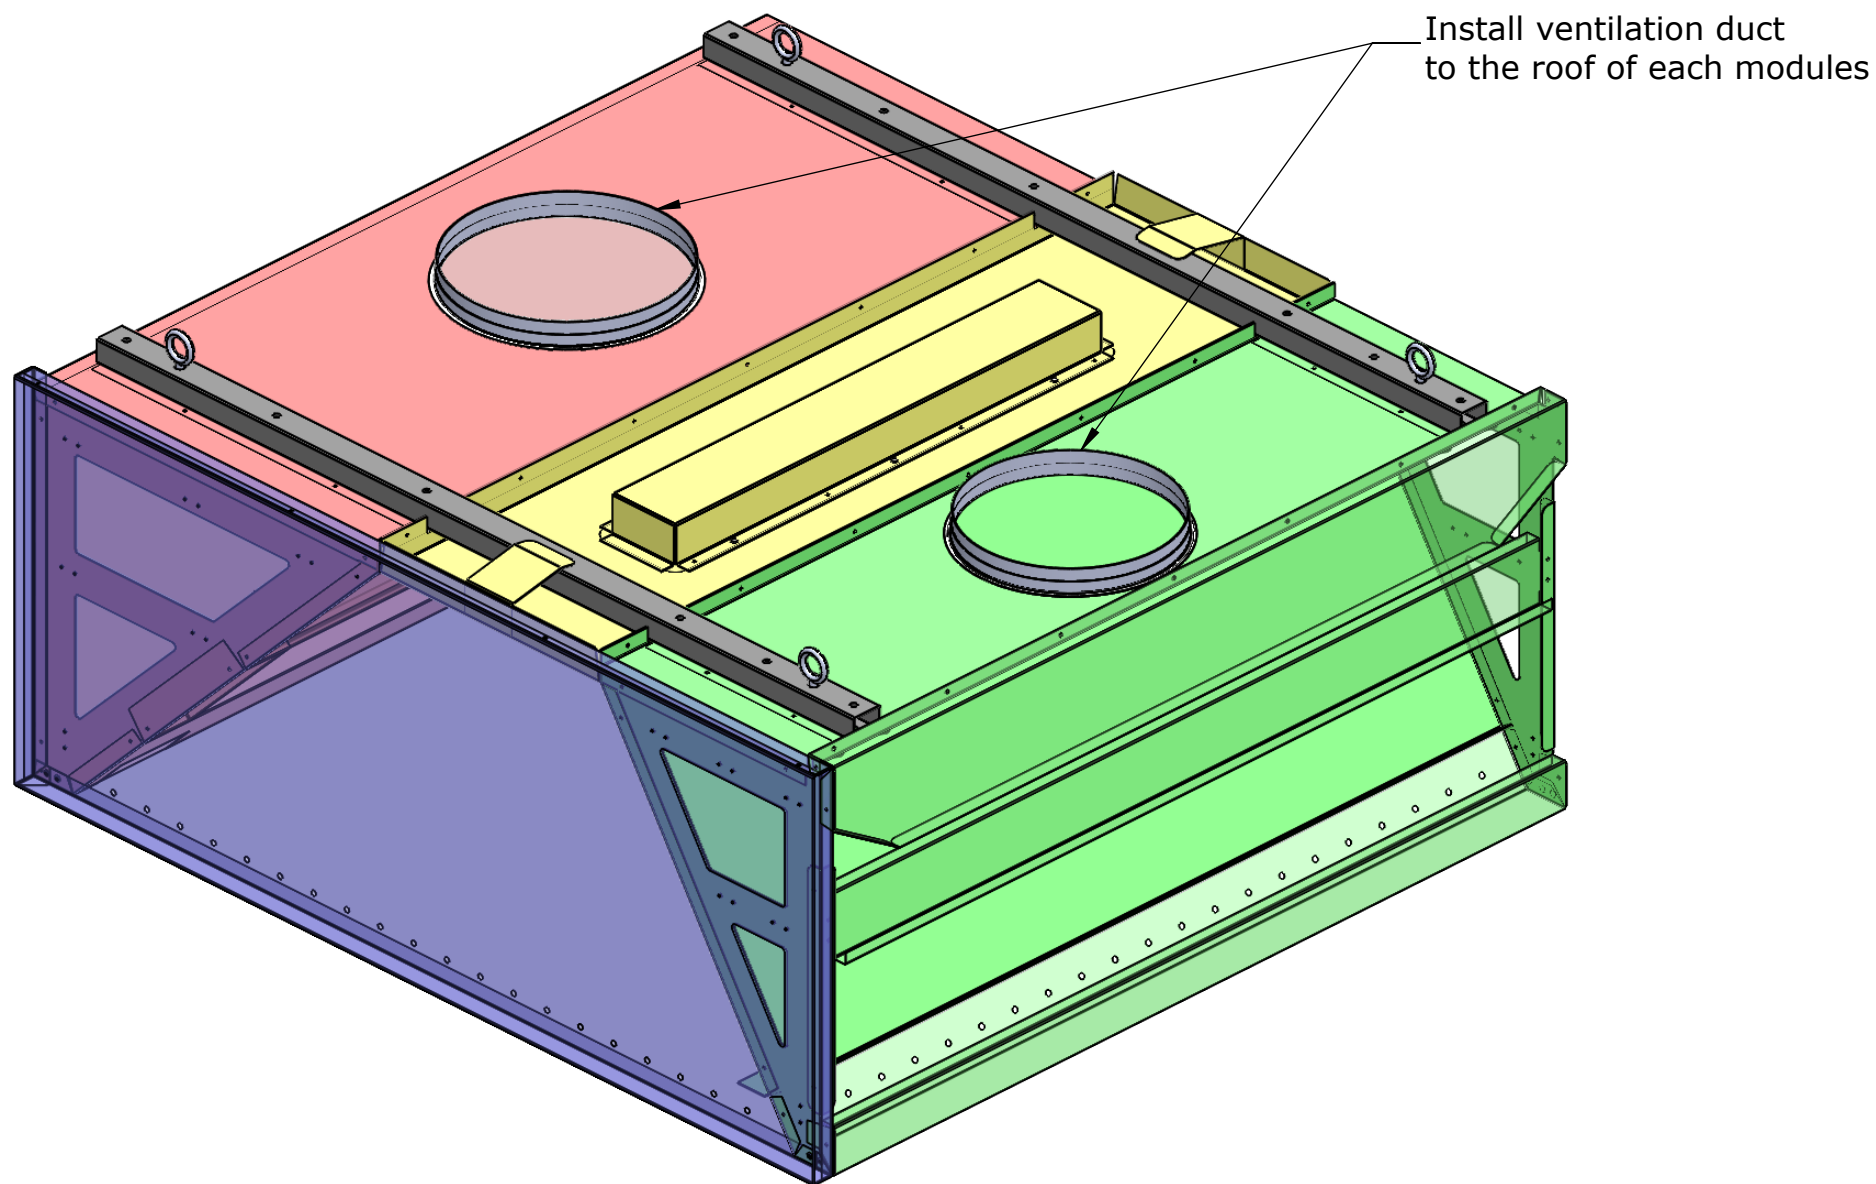


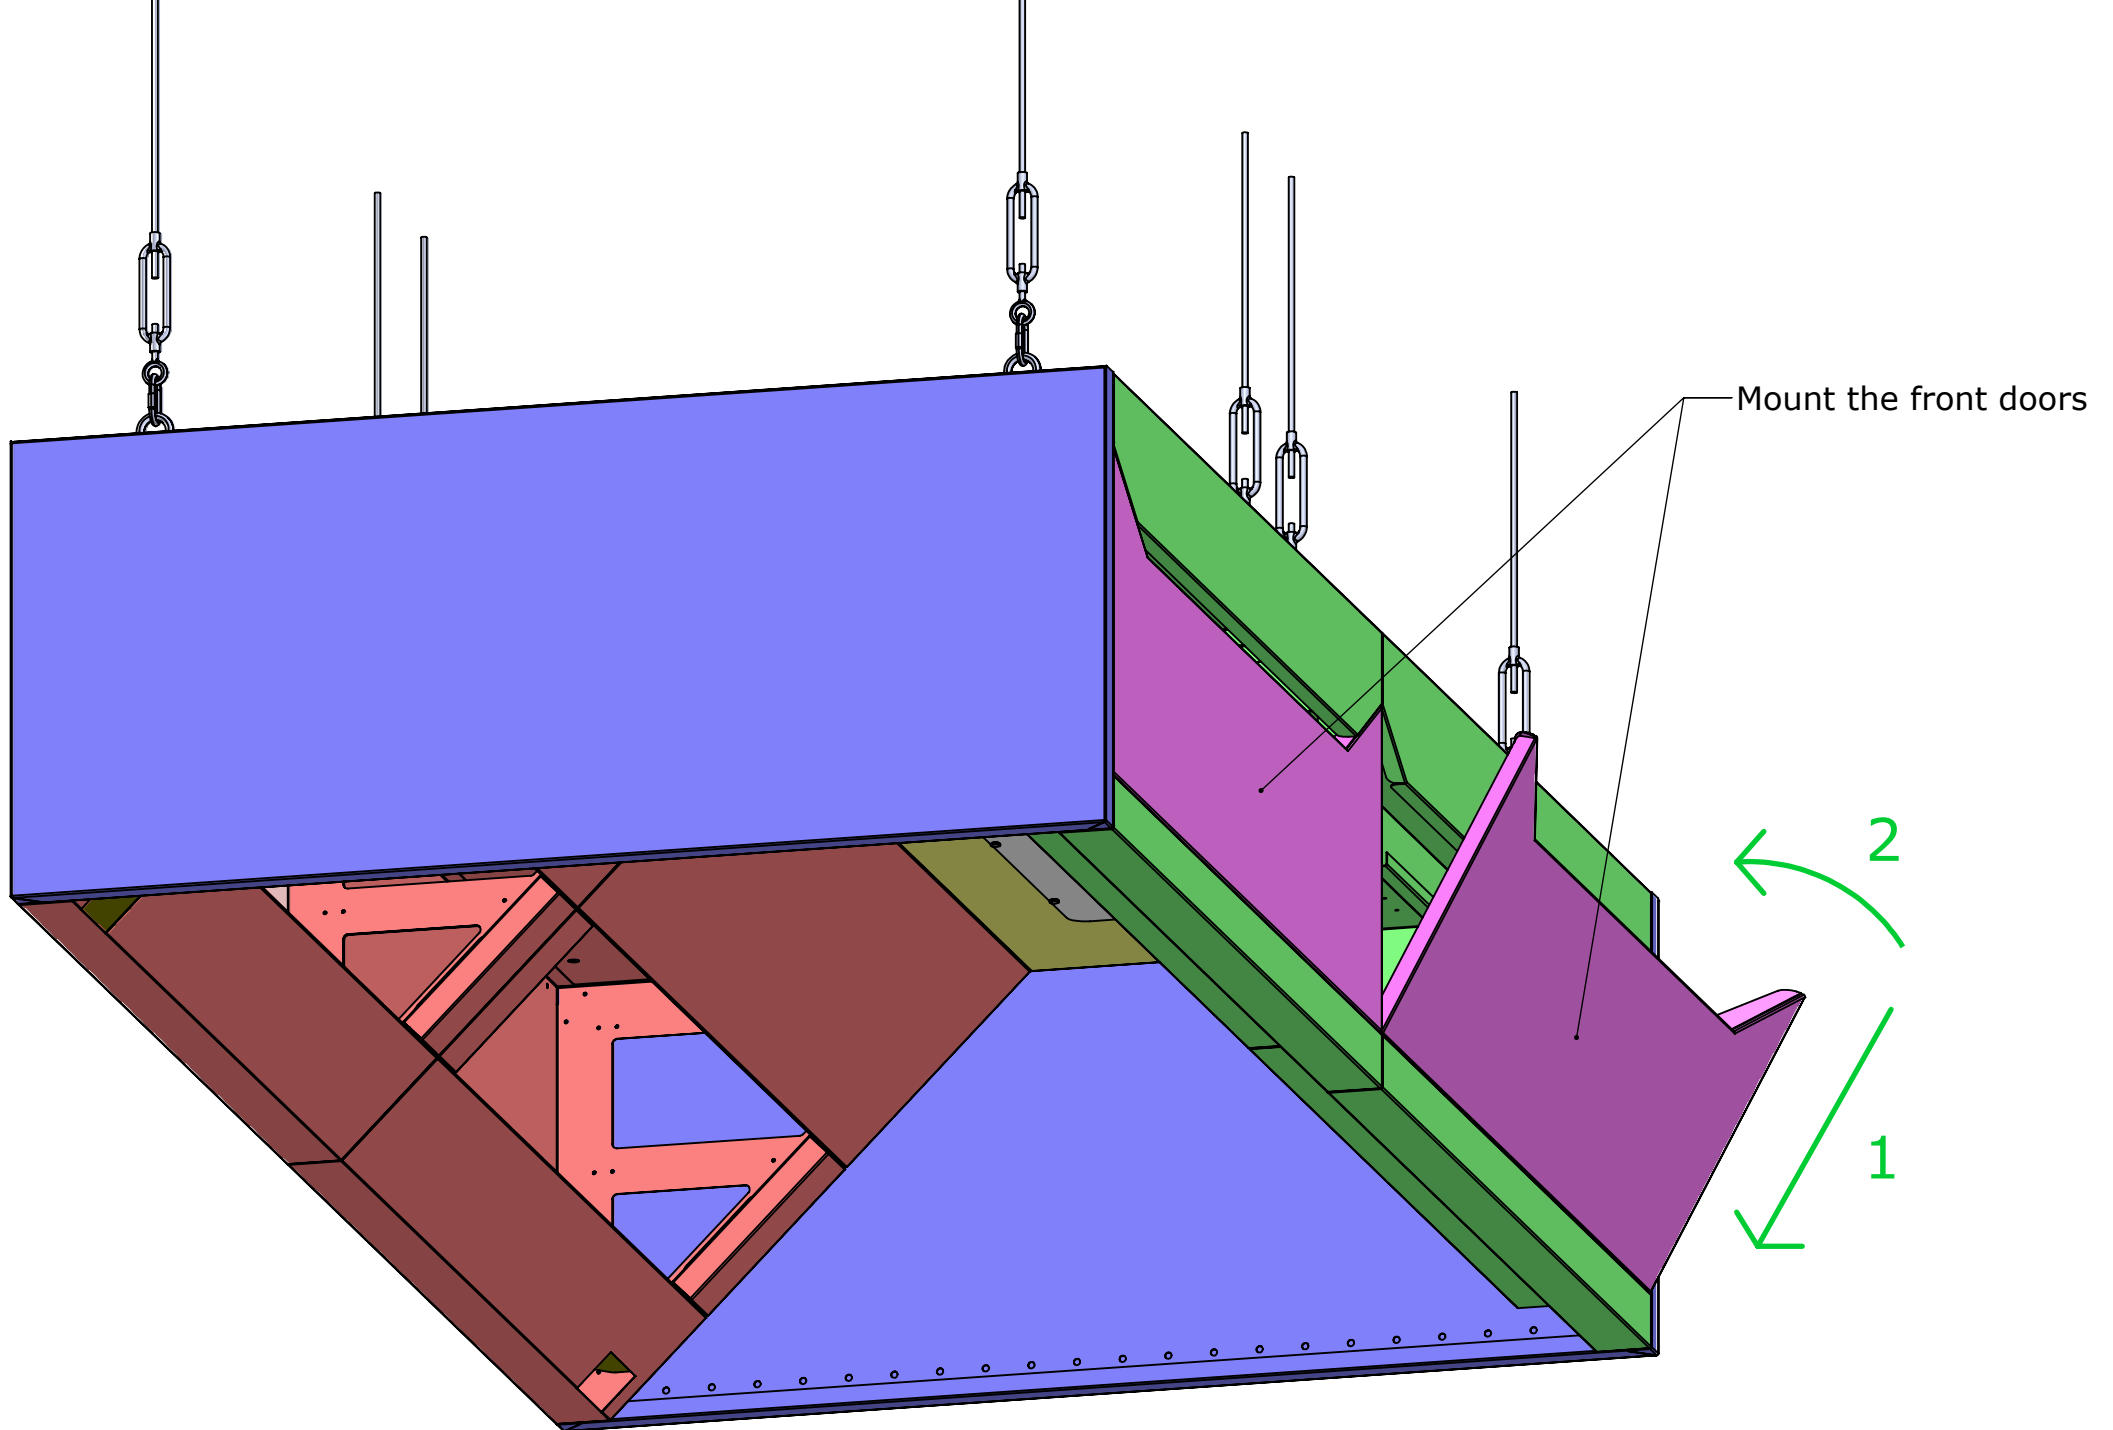

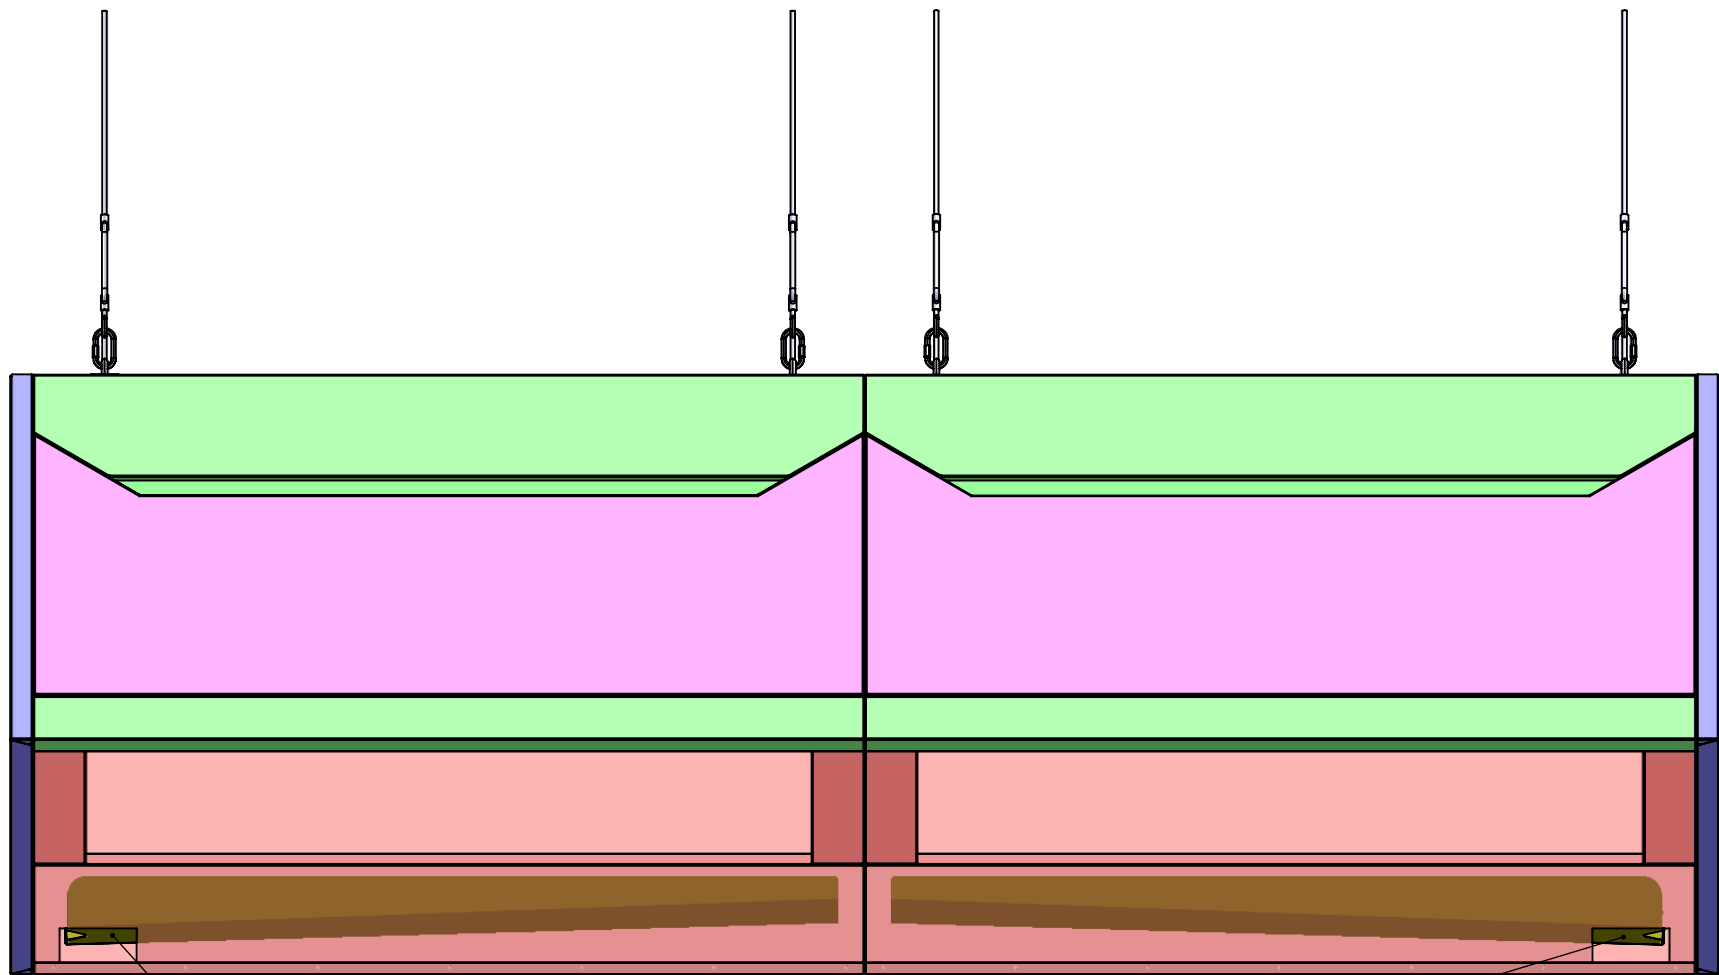



Oil gutters are to be  
installed with their lower  
side next to the oil drawer  
hole

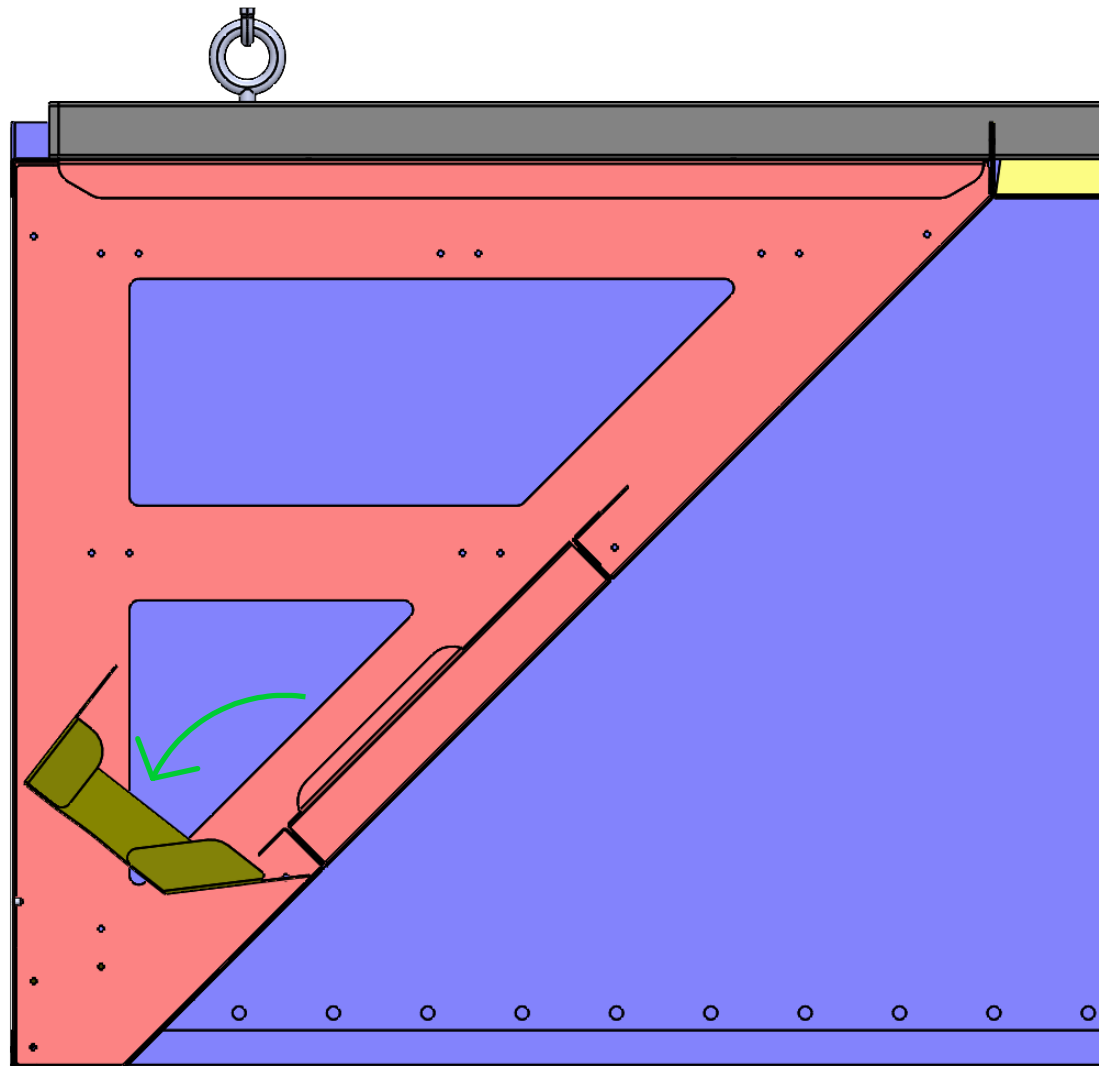

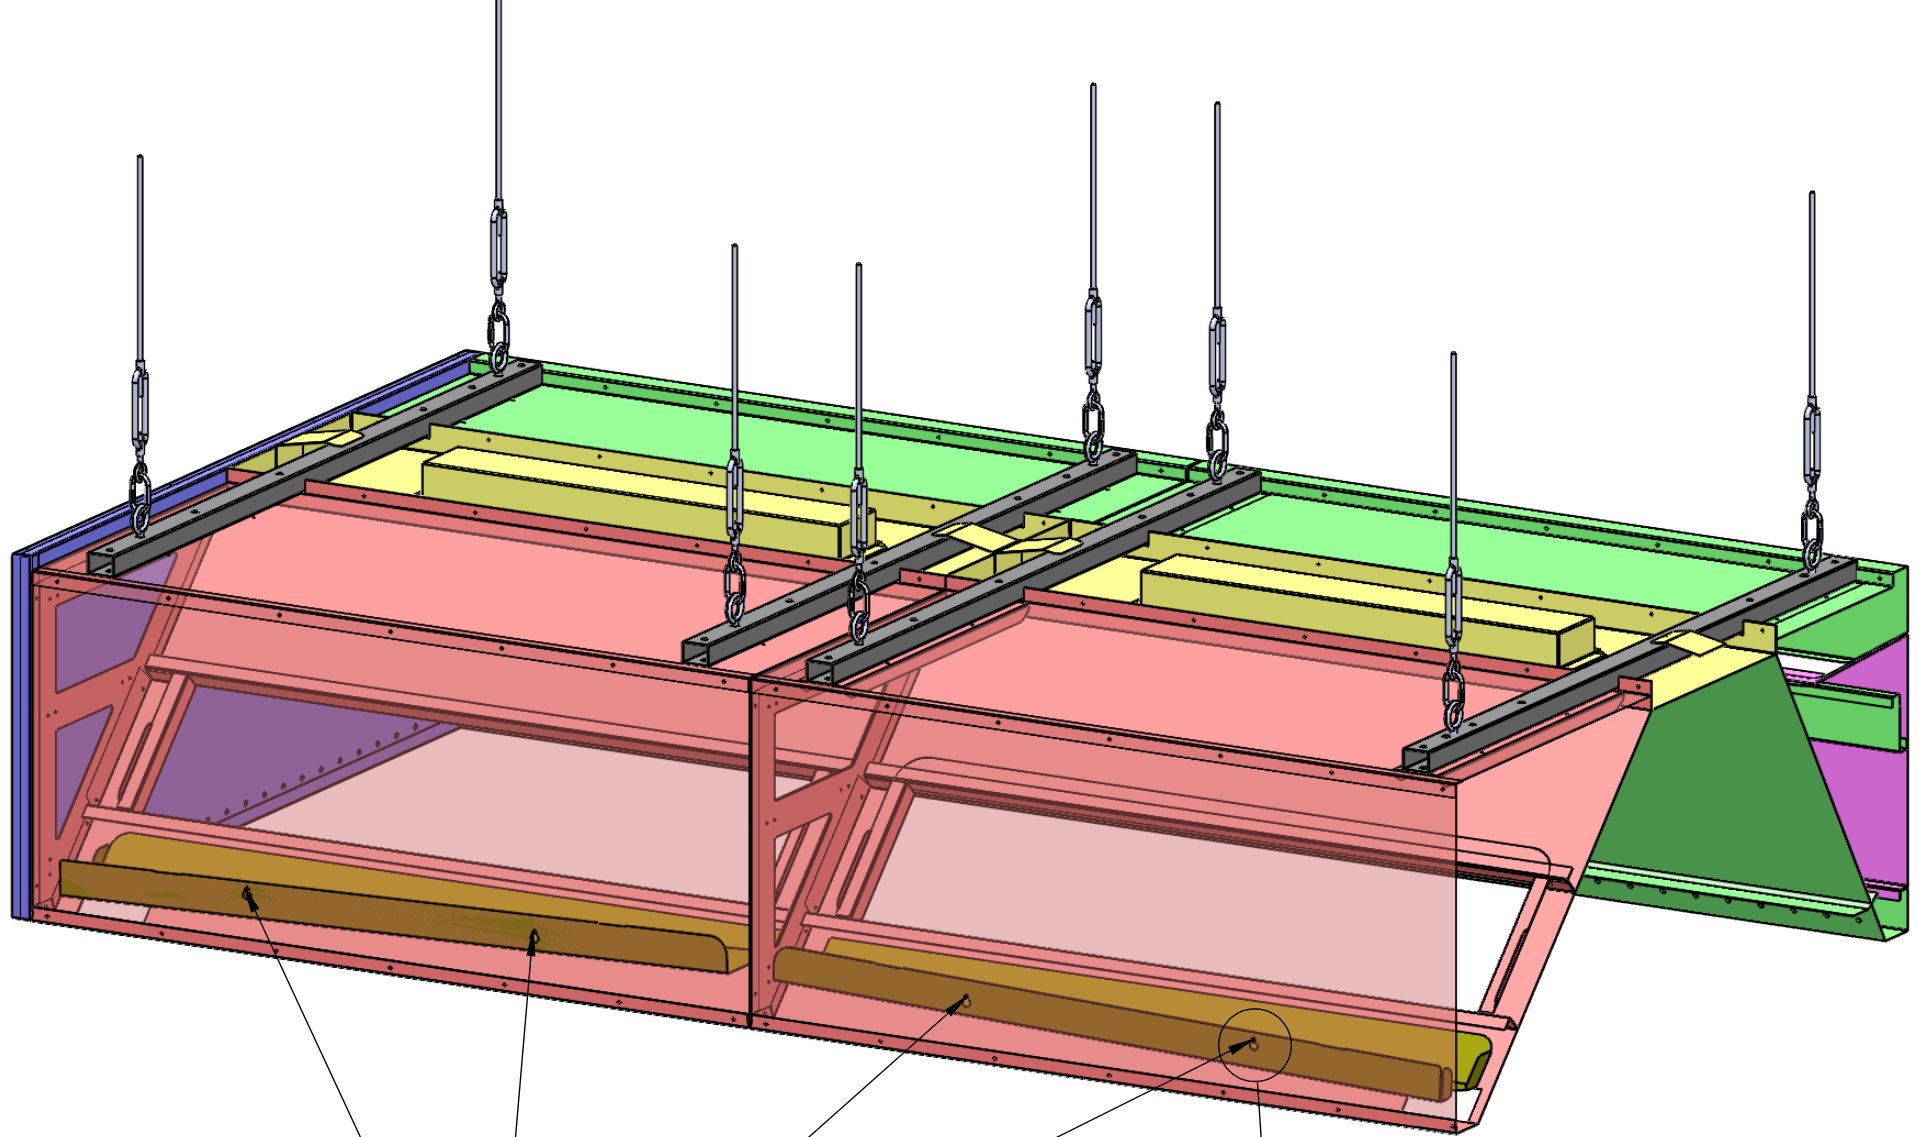


Fix the oil gutter with the pins

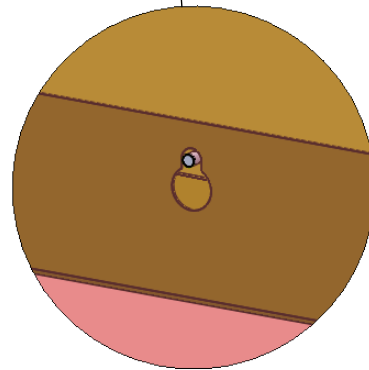

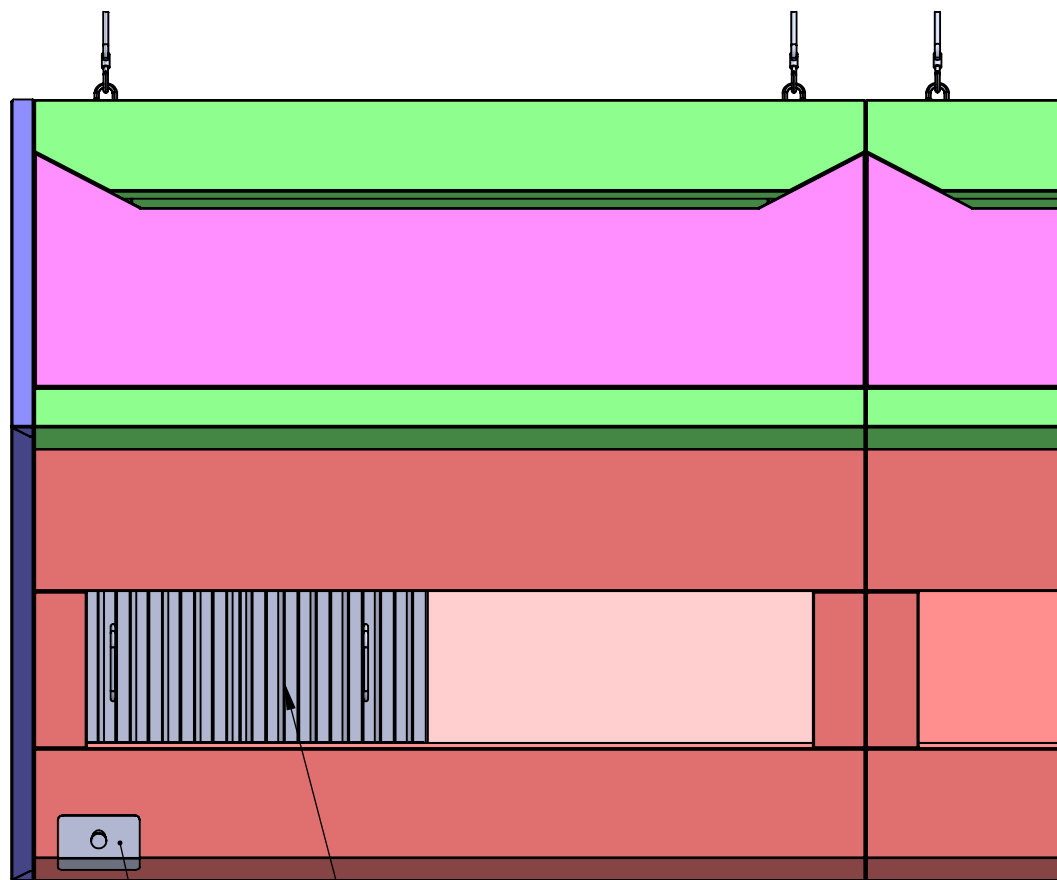


Install first Oil Filters

Install oil Drawers

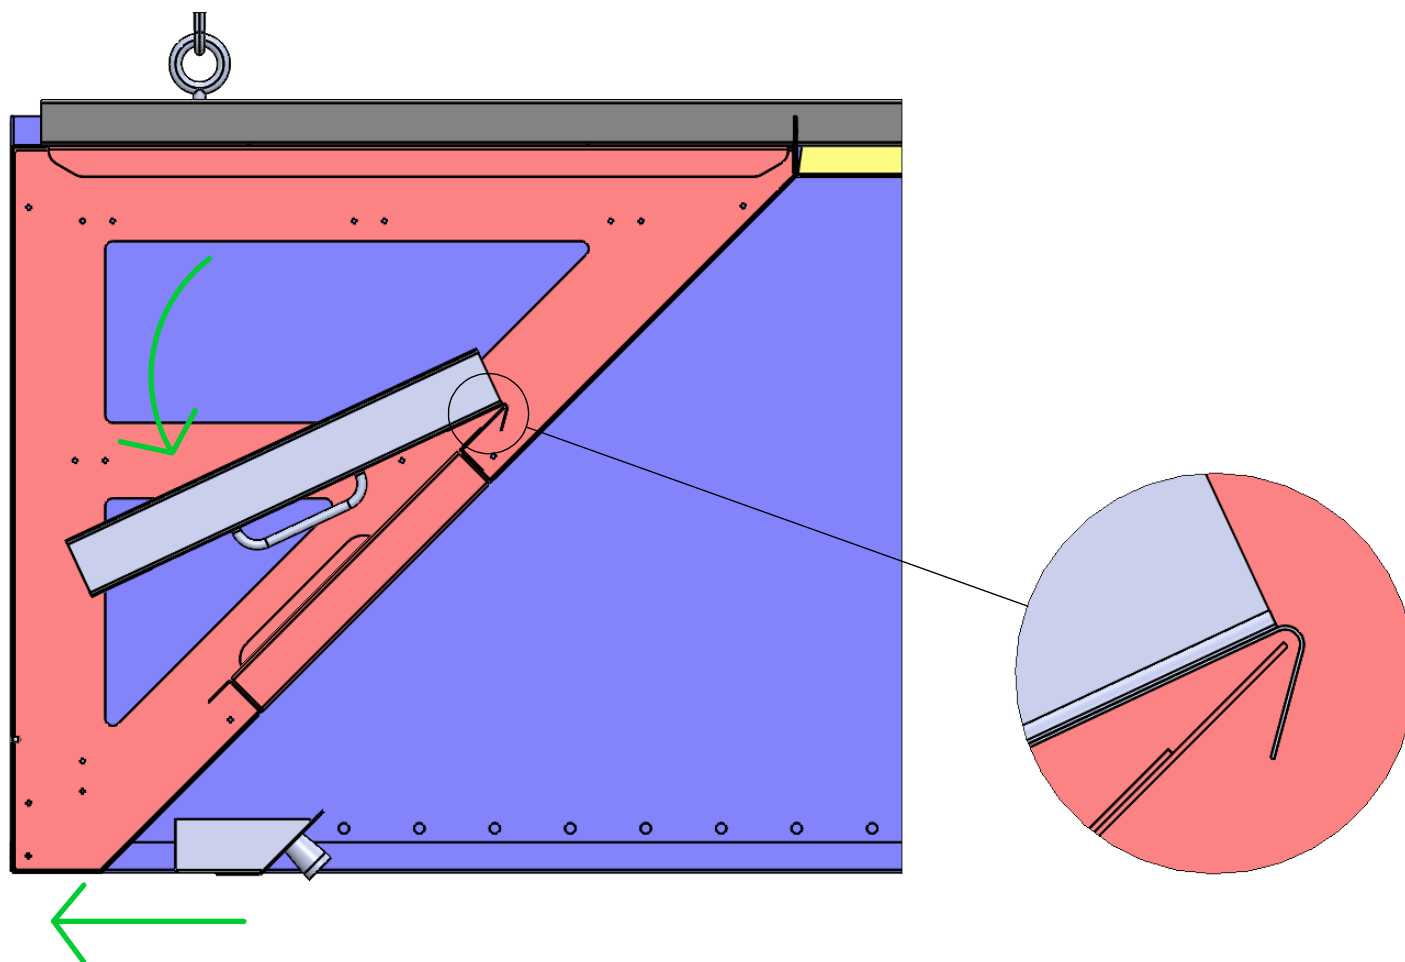




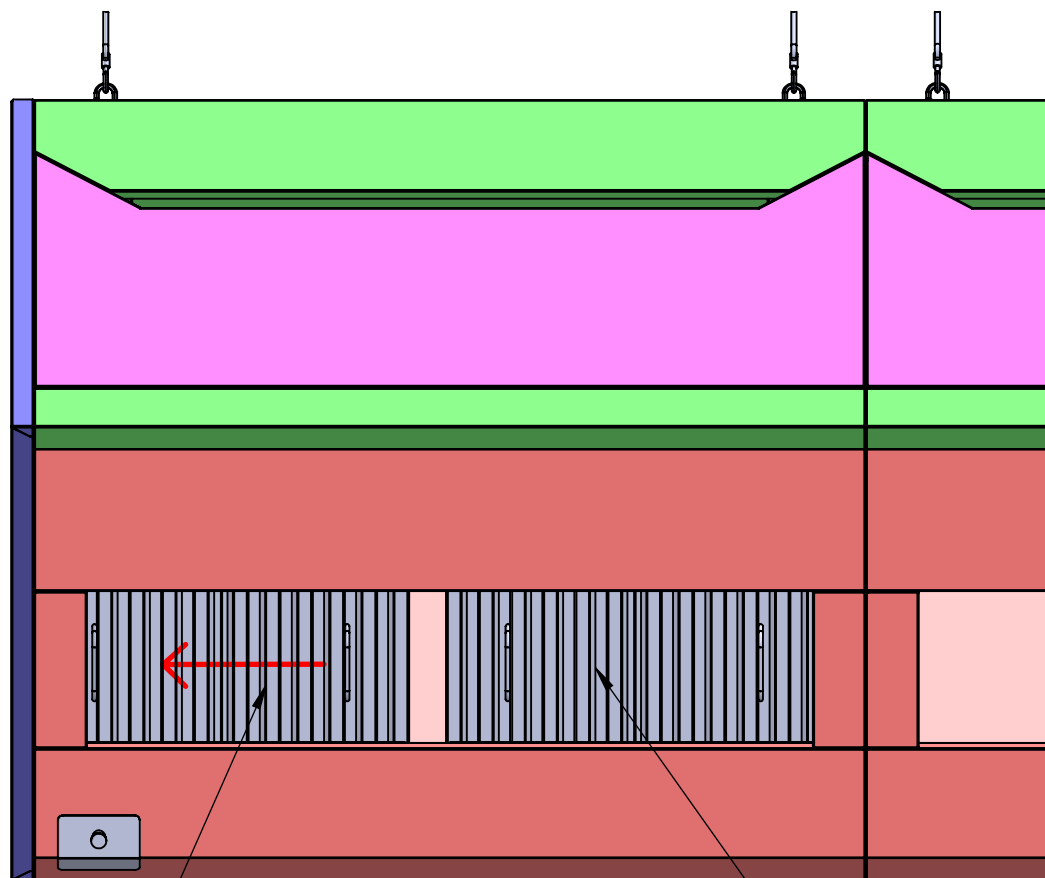

Move first filter to the side

Install second filter

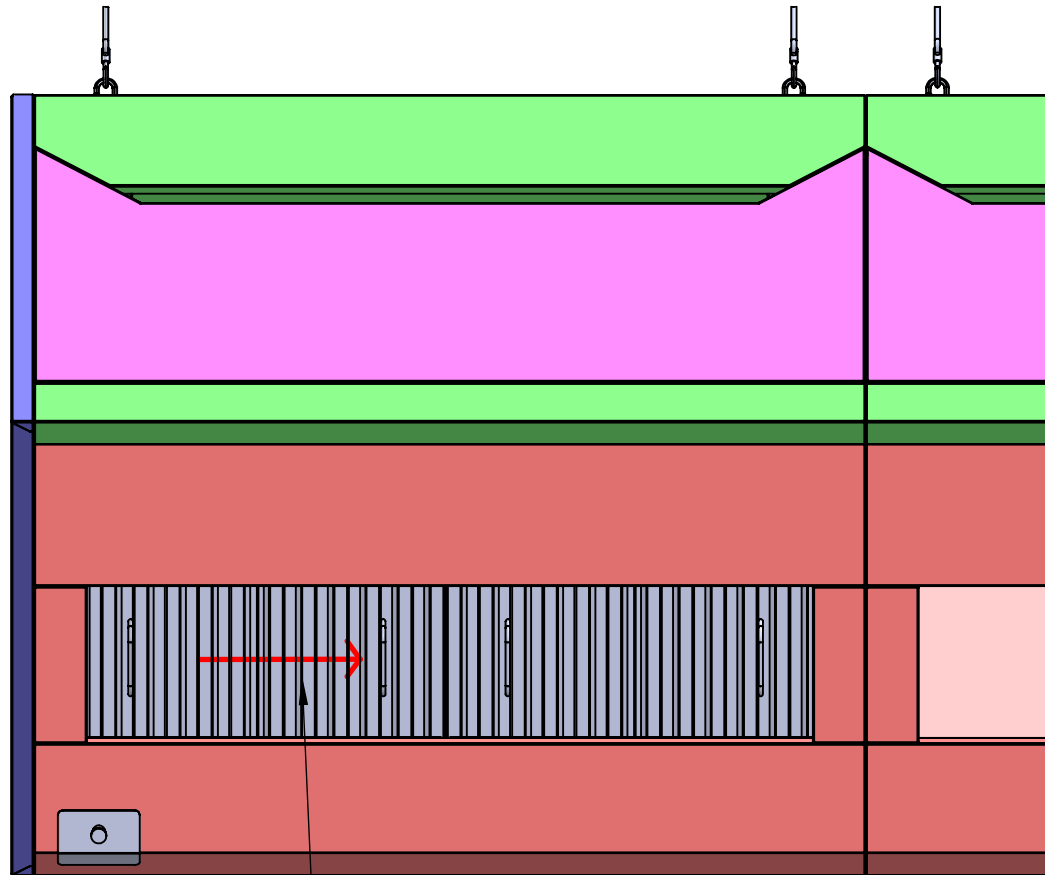

Move first filter back in place, so there is no gap on either side or in the middle